

# MC Series Illuminated Control Units

## Bright LED lamp illumination Rectangular and square body control units

- Super LED improves visibility and saves energy.
- Removable contact blocks promote easy PC board mounting.
- Snap-action switching contacts.
- Slow-action and maintained types are also available.
- The solder terminal accepts quick connect receptacles enhancing safety and enabling easy wiring.
- Illumination face division: Full to 4-way split (MC3D) or 2-way split (MC2D)
- Lens and color screens can be changed easily without the need for removal of power, because contacts are not operated when the lens is first inserted into the housing.
- UL and c-UL recognized, EN compliant



- See website for details on approvals and standards.



## MC Series

| Item                   | MC3D (Rectangular)   |                   | MC2D (Square)                        |
|------------------------|--|-------------------|--------------------------------------|
|                        | Horizontal Barrier   | Horizontal Flange | Flange                               |
| Illumination Face Size | 18.8 × 26.6 mm   |                   | 18.8 × 18.8 mm                       |
| Face Division          | Full to 4-way split  |                   | Full or horizontal 2-way split       |
| No. of Lamps           | Full illumination: 2<br>Vertical 2-way split: 2    Horizontal 2-way, 3-way, 4-way split: 4 |                   | Full: 1<br>Horizontal 2-way split: 2 |
| Illumination Color     | Amber, Green, Pure White, Red, Blue, Yellow  |                   |                                      |
| Contact Material       | Silver or gold plated silver   |                   |                                      |
| No. of Contacts        | SPDT, DPDT, 3PDT   |                   | SPDT, DPDT                           |
| Operation              | Momentary (snap action or slow action), maintained, pilot light                            |                   |                                      |
| Terminal Style         | Solder tab terminal #110 (compatible with quick connect receptacles), PC board terminal    |                   |                                      |
| Housing Color          | Black, gray  |                   |                                      |

## Specifications

|                       |   |
|-----------------------|---|
| Operating Temperature | -25 to +40°C (no freezing)  |
| Storage Temperature   | -30 to +60°C (no freezing)  |
| Operating Humidity    | 35 to 90% RH (no condensation)  |
| Insulation Resistance | Between live and dead metal parts:<br>100 MΩ (500V DC megger)<br>Between terminals of different poles:<br>100 MΩ (500V DC megger)                                   |
| Dielectric Strength   | Between live and dead metal parts: 2000V, 1 minute<br>Between live parts of different poles: 2000V, 1 minute<br>Between terminals of the same pole: 1000V, 1 minute |
| Contact Resistance    | 50 mΩ maximum (initial value)   |
| Vibration Resistance  | Operating extremes: 5 to 55 Hz, amplitude 0.5 mm<br>Damage limits: 5 to 55 Hz, amplitude 0.5 mm<br>(2 hours each in 3 axes)   |
| Shock Resistance      | Operating extremes: 200 m/s <sup>2</sup><br>Damage limits: 500 m/s <sup>2</sup>   |
| Mechanical Life       | Momentary (snap action): 1,000,000 operations min.<br>Maintained: 250,000 operations min.   |
| Electrical Life       | 100,000 operations min.   |
| Operating Frequency   | Momentary (snap action): 1,800 operations/hour<br>Maintained: 900 operations/hour   |
| Degree of Protection  | IP40  |

## Contact Ratings

### Silver Contact (switch base: gray)

|                          |            |                |      |      |      |
|--------------------------|------------|----------------|------|------|------|
| Rated Insulation Voltage |            | 250V           |      |      |      |
| Rated Operating Voltage  |            | 30V            | 125V | 250V |      |
| Rated Operating Current  | AC 50/60Hz | Resistive load | —    | 3A   | 2A   |
|                          |            | Inductive load | —    | 2A   | 1.5A |
|                          | DC         | Resistive load | 2A   | 0.4A | —    |
|                          |            | Inductive load | 1A   | 0.2A | —    |
| Rated Thermal Current    |            | 5A             |      |      |      |
| Contact Material         |            | Silver         |      |      |      |

- AC inductive load: PF=0.6 to 0.7    DC inductive load: L/R=7 ms max.

### Gold Contact (Switch Base: Blue)

|  |  |                    |         |
|--|--|--------------------|---------|
| Rated Insulation Voltage                 |  | 250V               |         |
| Rated Operating Voltage                  |  | 30V DC             | 125V AC |
| Rated Operating Current (resistive load) |  | 0.1A               | 0.1A    |
| Rated Thermal Current                    |  | 3A                 |         |
| Contact Material                         |  | Gold plated silver |         |

Minimum applicable load (reference value): 5V AC/DC, 1 mA

## LED Lamps



### LFTD LED Lamp

| Part No.               | LFTD-5*   | LFTD-6*      | LFTD-1*       | LFTD-2*       |
|------------------------|---|--------------|---------------|---------------|
| Lamp Base              | SX6S/8x5.4  |              |               |               |
| Operating Voltage      | 5V DC±5%  | 6V AC/DC±10% | 12V AC/DC±10% | 24V AC/DC±10% |
| Rated Voltage          | 5V DC   |              | 12V AC/DC     |               |
| Current Draw           | A, G, PW, R   | S            | A, G, PW, R   | S             |
|                        | 8 mA  | 7 mA         | 8 mA          | 7 mA          |
| Lamp Base Color        | Same as illumination color  |              |               |               |
| Voltage Marking        | Die stamped on the lamp base  |              |               |               |
| Life (reference value) | Approx. 50,000 hours<br>(When used on complete DC, the luminance is reduced to 50% of the initial intensity.) |              |               |               |
| Internal Circuit       |   |              |               |               |


- Specify a color code in place of \* in the Part No. A (amber), G (green), PW (pure white), R (red), S (blue)  
Use a PW (pure white) LED lamp for yellow illumination.
- Required Quantity of LED Lamps  
MC3D – Full and horizontal 2-way split: 2 lamps; Horizontal 2-way, 3-way, and 4-way split: 4 lamps  
MC2D – Full: 1 lamp; Horizontal 2-way split: 2 lamps

### Illumination Faces for LED


| Series | Face Type  | LED |
|--------|------------|-----|
| MC3    | A, C       | 2   |
|        | B, D, E, F | 4   |
| MC2    | A          | 1   |
|        | B          | 2   |




### Face Division



### MC3

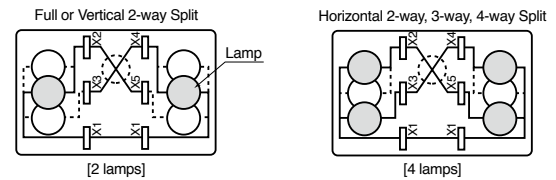


### MC2

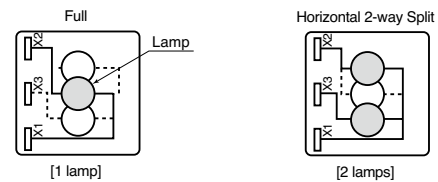

### Illumination Unit Structure

#### MC3D (Full to 4-way split illumination)

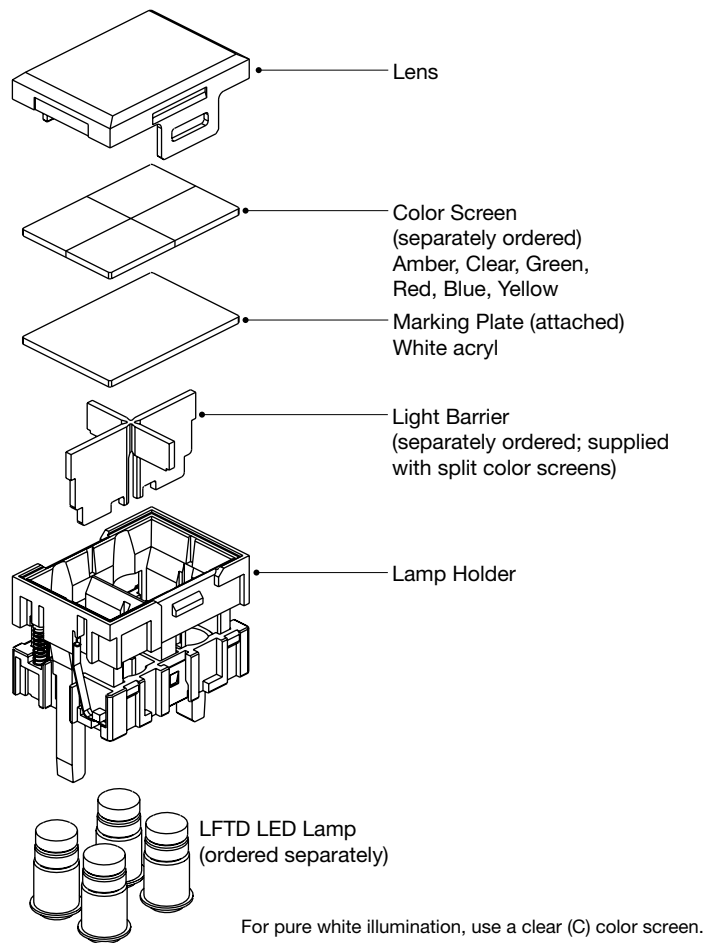

### Illumination Face Division & Illumination Color

| Used For                    | MC3D                    |               |               |                             |                    |  | MC2D                    |                             |
|-----------------------------|-------------------------|---------------|---------------|-----------------------------|--------------------|--|-------------------------|-----------------------------|
| Part No.                    | MC9Z-PA3*PN05           | MC9Z-3DB      | MC9Z-3DC      | MC9Z-3DD                    | MC9Z-3DE           | MC9Z-3DF                                 | MC9Z-PA2*PN05           | MC9Z-2DB                    |
| Face Division               |                         |               |               |                             |                    |  |                         |                             |
| Illumination Color and Size | *                       | R<br>GD       | R C<br>GD Y   | R<br>GD<br>A<br>C<br>Y<br>S | R C<br>GD Y<br>A S | R R<br>GD GD<br>A A<br>C C<br>Y Y<br>S S | *                       | R<br>GD<br>A<br>C<br>Y<br>S |
|                             | *                       | A             | GD Y          | A                           | GD Y               | A A                                      | *                       | A                           |
|                             | *                       | C             | A S           | C                           | A S                | C C                                      | *                       | C                           |
|                             | *                       | Y             |               | Y                           |                    | Y Y                                      | *                       | Y                           |
|                             | *                       | S             |               | S                           |                    | S S                                      | *                       | S                           |
|                             | *                       |               |               |                             | R C<br>GD Y<br>A S |  | *                       |                             |
|                             | *: Color Code           | Light Barrier | Light Barrier | Light Barrier               | Light Barrier      | Light Barrier                            | *: Color Code           | Light Barrier               |
| Quantity                    | Same color<br>5 pcs/set | 6 pcs/set     | 6 pcs/set     | 12 pcs/set                  | 12 pcs/set         | 12 pcs/set                               | Same color<br>5 pcs/set | 6 pcs/set                   |

\* Color Code: A (amber), C (clear), GD (green for LED), R (red), S (blue), Y (yellow)

\* Use clear (C) color screen for pure white illumination.

MC3D-\*\*OR (Rectangular Horizontal / Barrier)



Full  
□



2-way Split  
□ □



3-way Split  
□ □ □ □




4-way Split  
□ □ □ □

Package Quantity: 1


| Operation               | Contact | Part No.             |                     |                      |                     | Marking Plate | Color Screen   | Light Source   |                  |
|-------------------------|---------|----------------------|---------------------|----------------------|---------------------|---------------|--|--|------------------|
|                         |         | Solder/Tab Terminal  |                     | PC Board Terminal    |                     |               |  |  |                  |
|                         |         | Housing Color: Black | Housing Color: Gray | Housing Color: Black | Housing Color: Gray |               |  |  |                  |
| Momentary (Snap Action) | Silver  | SPDT                 | MC3D-M10RB          | MC3D-M10RN           | —                   | —             | White<br>Size: 24.8 x 17 x 1 mm<br>Material: Acrylic | Applicable LED Lamp<br>24V AC/DC: LFTD-2*<br>12V AC/DC: LFTD-1*<br>6V AC/DC: LFTD-6*<br>5V DC: LFTD-5* |                  |
|                         |         | DPDT                 | MC3D-M20RB          | MC3D-M20RN           | —                   | —             |  |  |                  |
|                         |         | 3PDT                 | MC3D-M30RB          | MC3D-M30RN           | —                   | —             |  |  |                  |
|                         | Gold    | SPDT                 | MC3D-M50RB          | MC3D-M50RN           | MC3D-M50VRB         | MC3D-M50VRN   |  |  |                  |
|                         |         | DPDT                 | MC3D-M60RB          | MC3D-M60RN           | MC3D-M60VRB         | MC3D-M60VRN   |  |  |                  |
|                         |         | 3PDT                 | MC3D-M70RB          | MC3D-M70RN           | MC3D-M70VRB         | MC3D-M70VRN   |  |  |                  |
| Momentary (Slow Action) | Silver  | SPDT                 | MC3D-S10RB          | MC3D-S10RN           | —                   | —             |  |  |                  |
|                         |         | DPDT                 | MC3D-S20RB          | MC3D-S20RN           | —                   | —             |  |  |                  |
|                         |         | 3PDT                 | MC3D-S30RB          | MC3D-S30RN           | —                   | —             |  |  |                  |
|                         | Gold    | SPDT                 | MC3D-S50RB          | MC3D-S50RN           | MC3D-S50VRB         | MC3D-S50VRN   |  |  |                  |
|                         |         | DPDT                 | MC3D-S60RB          | MC3D-S60RN           | MC3D-S60VRB         | MC3D-S60VRN   |  |  |                  |
|                         |         | 3PDT                 | MC3D-S70RB          | MC3D-S70RN           | MC3D-S70VRB         | MC3D-S70VRN   |  |  |                  |
| Maintained              | Silver  | SPDT                 | MC3D-A10RB          | MC3D-A10RN           | —                   | —             | Supplied   | Order Separately   |                  |
|                         |         | DPDT                 | MC3D-A20RB          | MC3D-A20RN           | —                   | —             |  |  |                  |
|                         |         | 3PDT                 | MC3D-A30RB          | MC3D-A30RN           | —                   | —             |  |  |                  |
|                         | Gold    | SPDT                 | MC3D-A50RB          | MC3D-A50RN           | MC3D-A50VRB         | MC3D-A50VRN   |  |  |                  |
|                         |         | DPDT                 | MC3D-A60RB          | MC3D-A60RN           | MC3D-A60VRB         | MC3D-A60VRN   |  |  |                  |
|                         |         | 3PDT                 | MC3D-A70RB          | MC3D-A70RN           | MC3D-A70VRB         | MC3D-A70VRN   |  |  |                  |
| Pilot Light             | —       | —                    | MC3D-P00RB          | MC3D-P00RN           | MC3D-P00VRB         | MC3D-P00VRN   |  |  | Order Separately |

Note 1: Specify a color code in place of \* in the LED lamp Part No.: A (amber), G (green), PW (pure white), R (red), S (blue)  
 Note 2: For pure white illumination, use a clear (C) color screen.

Dimensions

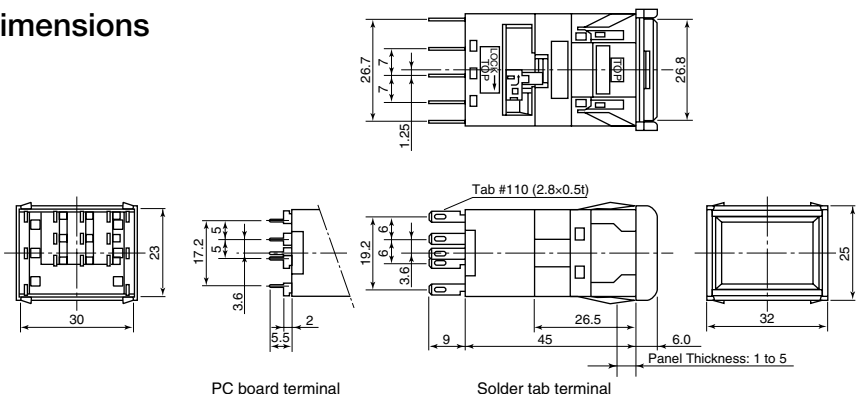

PC Board Drilling Layout (PC Board Terminal)




(Bottom View)

• See Single Board Mounting on page 37 for details about PC boards.

All dimensions in mm.


• For panel cut-out, see page 33.

Internal Connection (Bottom View)

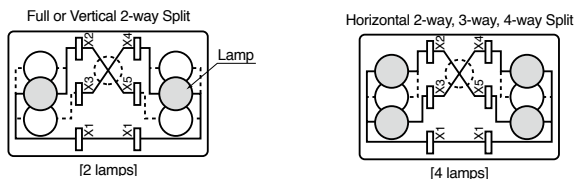

- Because terminals X2 through X5 are connected together internally, external jumper wiring is not needed for full illumination.
- When using split illumination, cut out the internal jumper using the jumper cutter (MC9Z-J1). See page 36.
- LED lamps are not supplied and must be ordered separately.

Internal Connection (Bottom View)

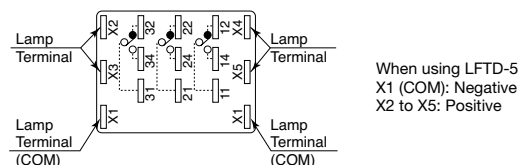


When using LFTD-5 X1 (COM): Negative X2 to X5: Positive

- SPDT contact type has lamp terminals and contact terminals in the middle only.
- DPDT contact type has lamp terminals and contact terminals on both sides (not in the middle).
- Pilot light has lamp terminals only.

MC3D-\*\*0F (Rectangular Horizontal / Flange)



Full  
□



2-way Split  
□ □



3-way Split  
□ □ □ □



4-way Split  
□ □ □ □

Package Quantity: 1


| Operation               | Contact | Part No.             |                     |                      |                     | Marking Plate | Color Screen   | Light Source   |
|-------------------------|---------|----------------------|---------------------|----------------------|---------------------|---------------|--|--|
|                         |         | Solder/Tab Terminal  |                     | PC Board Terminal    |                     |               |  |  |
|                         |         | Housing Color: Black | Housing Color: Gray | Housing Color: Black | Housing Color: Gray |               |  |  |
| Momentary (Snap Action) | Silver  | SPDT                 | MC3D-M10FB          | MC3D-M10FN           | —                   | —             | White<br>Size: 24.8 x 17 x 1 mm<br>Material: Acrylic | Applicable LED Lamp<br>24V AC/DC: LFTD-2*<br>12V AC/DC: LFTD-1*<br>6V AC/DC: LFTD-6*<br>5V DC: LFTD-5* |
|                         |         | DPDT                 | MC3D-M20FB          | MC3D-M20FN           | —                   | —             |  |  |
|                         |         | 3PDT                 | MC3D-M30FB          | MC3D-M30FN           | —                   | —             |  |  |
|                         | Gold    | SPDT                 | MC3D-M50FB          | MC3D-M50FN           | MC3D-M50VFB         | MC3D-M50VFN   |  |  |
|                         |         | DPDT                 | MC3D-M60FB          | MC3D-M60FN           | MC3D-M60VFB         | MC3D-M60VFN   |  |  |
|                         |         | 3PDT                 | MC3D-M70FB          | MC3D-M70FN           | MC3D-M70VFB         | MC3D-M70VFN   |  |  |
| Momentary (Slow Action) | Silver  | SPDT                 | MC3D-S10FB          | MC3D-S10FN           | —                   | —             |  |  |
|                         |         | DPDT                 | MC3D-S20FB          | MC3D-S20FN           | —                   | —             |  |  |
|                         |         | 3PDT                 | MC3D-S30FB          | MC3D-S30FN           | —                   | —             |  |  |
|                         | Gold    | SPDT                 | MC3D-S50FB          | MC3D-S50FN           | MC3D-S50VFB         | MC3D-S50VFN   |  |  |
|                         |         | DPDT                 | MC3D-S60FB          | MC3D-S60FN           | MC3D-S60VFB         | MC3D-S60VFN   |  |  |
|                         |         | 3PDT                 | MC3D-S70FB          | MC3D-S70FN           | MC3D-S70VFB         | MC3D-S70VFN   |  |  |
| Maintained              | Silver  | SPDT                 | MC3D-A10FB          | MC3D-A10FN           | —                   | —             |  |  |
|                         |         | DPDT                 | MC3D-A20FB          | MC3D-A20FN           | —                   | —             |  |  |
|                         |         | 3PDT                 | MC3D-A30FB          | MC3D-A30FN           | —                   | —             |  |  |
|                         | Gold    | SPDT                 | MC3D-A50FB          | MC3D-A50FN           | MC3D-A50VFB         | MC3D-A50VFN   |  |  |
|                         |         | DPDT                 | MC3D-A60FB          | MC3D-A60FN           | MC3D-A60VFB         | MC3D-A60VFN   |  |  |
|                         |         | 3PDT                 | MC3D-A70FB          | MC3D-A70FN           | MC3D-A70VFB         | MC3D-A70VFN   |  |  |
| Pilot Light             | —       | —                    | MC3D-P00FB          | MC3D-P00FN           | MC3D-P00VFB         | MC3D-P00VFN   | —  |  |

Note 1: Specify a color code in place of \* in the LED lamp Part No.: A (amber), G (green), PW (pure white), R (red), S (blue)


Note 2: For pure white illumination, use a clear (C) color screen.

• The rectangular flange unit can be mounted vertically. Replace the leaf springs with optional vertical mounting leaf springs (MC9Z-T3).

Dimensions

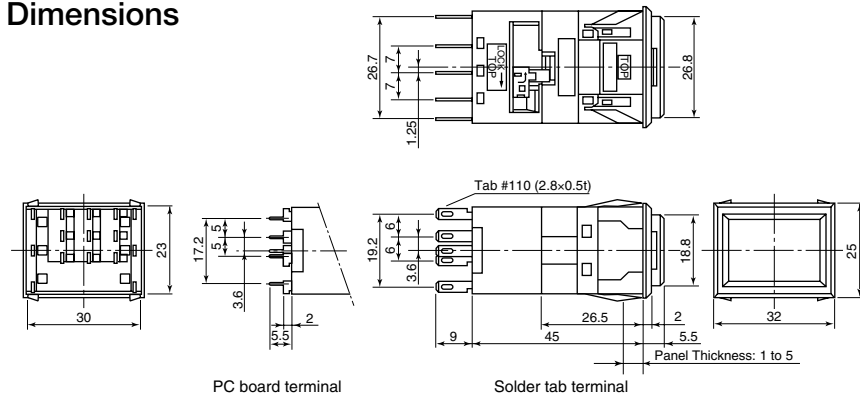

PC Board Drilling Layout (PC Board Terminal)




• See Single Board Mounting on page 37 for details about PC boards.


All dimensions in mm.

• For panel cut-out, see page 33.

Internal Connection (Bottom View)

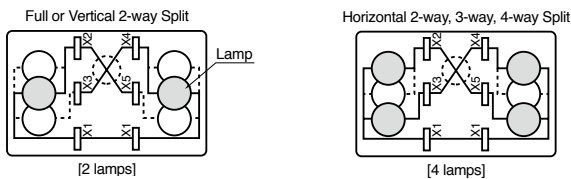

Terminal Arrangement (Bottom View)



When using LFTD-5  
X1 (COM): Negative  
X2 to X5: Positive

- Because terminals X2 through X5 are connected together internally, external jumper wiring is not needed for full illumination.
- When using split illumination, cut out the internal jumper using the jumper cutter (MC9Z-J1). See page 36.
- LED lamps are not supplied and must be ordered separately.

- SPDT contact type has lamp terminals and contact terminals in the middle only.
- DPDT contact type has lamp terminals and contact terminals on both sides (not in the middle).
- Pilot light has lamp terminals only.

MC2D-\*\*0 (Square / Flange)



Full



2-way Split




Package Quantity: 1


| Operation               | Contact | Part No.             |                     |                      |                     | Marking Plate | Color Screen                                       | Light Source   |                   |                   |
|-------------------------|---------|----------------------|---------------------|----------------------|---------------------|---------------|--|--|-------------------|-------------------|
|                         |         | Solder/Tab Terminal  |                     | PC Board Terminal    |                     |               |  |  |                   |                   |
|                         |         | Housing Color: Black | Housing Color: Gray | Housing Color: Black | Housing Color: Gray |               |  |  |                   |                   |
| Momentary (Snap Action) | Silver  | SPDT                 | MC2D-M10B           | MC2D-M10N            | —                   | —             | White<br>Size: 17 x 17 x 1 mm<br>Material: Acrylic | Applicable LED Lamp<br>24V AC/DC: LFTD-2*<br>12V AC/DC: LFTD-1*<br>6V AC/DC: LFTD-6*<br>5V DC: LFTD-5* |                   |                   |
|                         |         | DPDT                 | MC2D-M20B           | MC2D-M20N            | —                   | —             |  |  |                   |                   |
|                         | Gold    | SPDT                 | MC2D-M50B           | MC2D-M50N            | MC2D-M50VB          | MC2D-M50VN    |  |  |                   |                   |
| DPDT                    |         | MC2D-M60B            | MC2D-M60N           | MC2D-M60VB           | MC2D-M60VN          |               |  |  |                   |                   |
| Momentary (Slow Action) | Silver  | SPDT                 | MC2D-S10B           | MC2D-S10N            | —                   | —             |  |  | Material: Acrylic | Material: Acrylic |
|                         |         | DPDT                 | MC2D-S20B           | MC2D-S20N            | —                   | —             |  |  |                   |                   |
|                         | Gold    | SPDT                 | MC2D-S50B           | MC2D-S50N            | MC2D-S50VB          | MC2D-S50VN    |  |  |                   |                   |
| DPDT                    |         | MC2D-S60B            | MC2D-S60N           | MC2D-S60VB           | MC2D-S60VN          |               |  |  |                   |                   |
| Maintained              | Silver  | SPDT                 | MC2D-A10B           | MC2D-A10N            | —                   | —             | Supplied   | Order Separately   |                   |                   |
|                         |         | DPDT                 | MC2D-A20B           | MC2D-A20N            | —                   | —             |  |  |                   |                   |
|                         | Gold    | SPDT                 | MC2D-A50B           | MC2D-A50N            | MC2D-A50VB          | MC2D-A50VN    |  |  |                   |                   |
| DPDT                    |         | MC2D-A60B            | MC2D-A60N           | MC2D-A60VB           | MC2D-A60VN          |               |  |  |                   |                   |
| Pilot Light             | —       | —                    | MC2D-P00B           | MC2D-P00N            | MC2D-P00VB          | MC2D-P00VN    |  |  | Order Separately  | Order Separately  |

Note 1: Specify a color code in place of \* in the LED lamp Part No.: A (amber), G (green), PW (pure white), R (red), S (blue), Y (yellow)  
 Note 2: For pure white illumination, use a clear (C) color screen.  
 • 2-way split unit can be mounted vertically. Replace the leaf springs with optional vertical mounting leaf springs (MC9Z-T3).

Dimensions

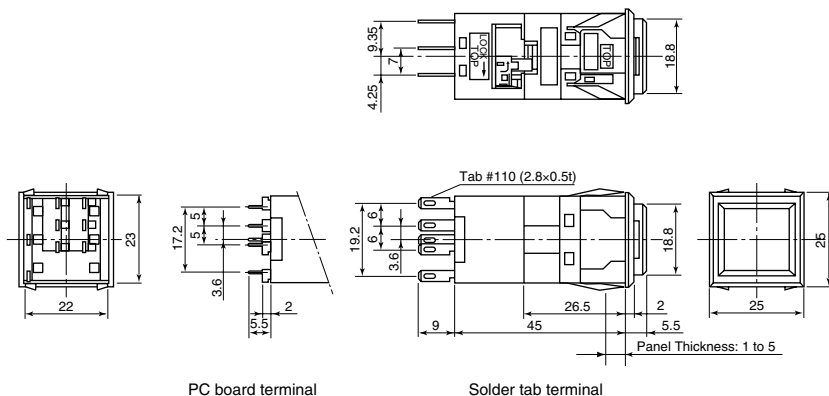

PC Board Drilling Layout (PC Board Terminal)




(Bottom View)

• See Single Board Mounting on page 37 for details about PC boards.

All dimensions in mm.


• For panel cut-out, see page 33.

Internal Connection (Bottom View)

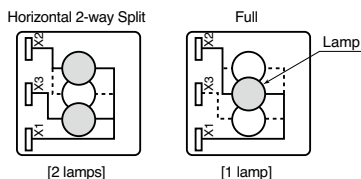

• LED lamps are not supplied and must be ordered separately.










Terminal Arrangement (Bottom View)



When using LFTD-5  
 X1 (COM): Negative  
 X2 to X5: Positive

• SPDT contact has lamp terminals and contact terminals on the right only.  
 • Pilot light has lamp terminals only.


Accessories

| Name & Shape  | For Use On                | Specifications               | Part No.  | Ordering No.  | Package Quantity | Remarks   |  |
|---|---------------------------|------------------------------|-----------|---------------|------------------|---|--|
| Lamp Holder Removal Tool<br>                                     | All Series                | —                            | MCM-T001  | MCM-T001      | 1                | <ul style="list-style-type: none"> <li>Used to remove the lamp holder from the housing.</li> <li>Material: Stainless Steel</li> </ul>   |  |
| Jumper Cutter<br>  | MC3D                      | —                            | MC9Z-J1   | MC9Z-J1       | 1                | <ul style="list-style-type: none"> <li>Used to cut the built-in jumper when changing the MC3D for 2-way, 3-way, or 4-way split illumination. See page 36.</li> <li>Material: Metal</li> </ul>   |  |
| Switch Guard with Lens<br>                                       | MC3D                      | Horizontal type              | MC9Z-KF3  | MC9Z-KF3      | 1                | <ul style="list-style-type: none"> <li>Used in place of the standard lens to protect the operator, and can be installed in the same manner as the standard lens.</li> <li>When guard barriers are installed, the lens switch guard cannot be used.</li> <li>Material: Polycarbonate</li> </ul>                      |  |
|   |                           | Vertical type                | MC9Z-KT3  | MC9Z-KT3      | 1                |   |  |
|   | MC2D                      | Horizontal type              | MC9Z-KF2  | MC9Z-KF2      | 1                |   |  |
| Barrier<br><br>End Barrier    Spacer Barrier                     | MC3D<br>Horizontal Flange | End barrier                  | Black     | MC9Z-BF1B     | MC9Z-BF1BPN10    | 10  | <ul style="list-style-type: none"> <li>The barrier is used to separate adjoining operators of flange type MC3D/2D units to prevent inadvertent operation and to improve panel appearance.</li> <li>See page 33 for panel cut-out.</li> <li>Material: Polycarbonate</li> </ul>  |
|   |                           |                              | Gray      | MC9Z-BF1N     | MC9Z-BF1NPN10    |   |  |
|   | MC2D                      | Spacer barrier               | Black     | MC9Z-BF2B     | MC9Z-BF2BPN10    | 10  |  |
|   |                           |                              | Gray      | MC9Z-BF2N     | MC9Z-BF2NPN10    |   |  |
|   | MC3D<br>Vertical Flange   | End barrier                  | Black     | MC9Z-BT1B     | MC9Z-BT1BPN10    | 10  |  |
|   |                           |                              | Gray      | MC9Z-BT1N     | MC9Z-BT1NPN10    |   |  |
| Spacer barrier  |                           | Black                        | MC9Z-BT2B | MC9Z-BT2BPN10 | 10               |   |  |
|   |                           | Gray                         | MC9Z-BT2N | MC9Z-BT2NPN10 |                  |   |  |
| Guard Barrier<br><br>End Guard Barrier    Spacer Guard Barrier | MC3D<br>Horizontal Flange | End guard barrier            | Black     | MCM-BF3B      | MCM-BF3BPN10     | 10  | <ul style="list-style-type: none"> <li>The guard barrier is used to surround the operator of flange type MC3D/2D units for preventing inadvertent operation.</li> <li>The guard barrier cannot be used on barrier type or vertical flange type MC3D units.</li> <li>See page 33 for panel cut-out.</li> <li>Material: Polyamide</li> </ul> |
|   |                           |                              | Gray      | MCM-BF3N      | MCM-BF3NPN10     |   |  |
|   | MC2D<br>Horizontal        | Spacer guard barrier         | Black     | MCM-BF4B      | MCM-BF4BPN10     | 10  |  |
|   |                           |                              | Gray      | MCM-BF4N      | MCM-BF4NPN10     |   |  |
| Terminal Socket<br>  | MC3D                      | With solder terminals        | MC9Z-C3   | MC9Z-C3       | 1                | <ul style="list-style-type: none"> <li>Material: Polyamide</li> </ul>   |  |
|   |                           | With PC board terminals      | MC9Z-C3V  | MC9Z-C3V      | 1                |   |  |
|   | MC2D                      | With solder terminals        | MC9Z-C2   | MC9Z-C2       | 1                |   |  |
|   |                           | With PC board terminals      | MC9Z-C2V  | MC9Z-C2V      | 1                |   |  |
| Terminal Cover<br>   | MC3D                      | —                            | MC9Z-VL23 | MC9Z-VL23     | 5                | <ul style="list-style-type: none"> <li>When wiring, insert lead wires through terminal cover holes before soldering the lead wires to the MC3D/2D terminals.</li> <li>White</li> <li>Material: PBT</li> </ul>   |  |
|   | MC2D                      | —                            | MC9Z-VL22 | MC9Z-VL22     | 5                |   |  |
| Dustproof Cover<br>  | MC3D                      | Flange (horizontal/vertical) | MCM-D3    | MCM-D3        | 1                | <ul style="list-style-type: none"> <li>The dustproof cover is not waterproof.</li> <li>See page 33 for panel cut-out.</li> <li>Material<br/>Base: Polypropylene<br/>Cover: PVC elastomer</li> </ul>   |  |
|   | MC2D                      | Flange                       | MCM-D2    | MCM-D2        | 1                |   |  |
| Vertical Mounting Leaf Spring<br>                              | MC3D<br>MC2D              | —                            | MC9Z-T3   | MC9Z-T3PN10   | 10               | <ul style="list-style-type: none"> <li>Leaf springs for mounting the flange type MC3D vertically.</li> <li>When using the vertical mounting leaf springs, remove the existing leaf springs from the MC3D and install the vertical mounting leaf springs. See page 35.</li> <li>Material: Stainless Steel</li> </ul> |  |




Accessories


LED Lamps (LFTD)

|  | Operating Voltage | Rated Current               |                                    | Part No. | Ordering No. | Illumination Color Code   | Package Quantity | Base       |
|--|-------------------|-----------------------------|------------------------------------|----------|--------------|---|------------------|------------|
|  |                   | DC                          | AC                                 |          |              |   |                  |            |
|  <p>LFTD LED Lamp</p> | 5V DC±5%          | 8 mA (except S)<br>7 mA (S) | —                                  | LFTD-5*  | LFTD-5*      | Specify a color code in place of * in the Ordering Part No.<br><br>A: amber<br>G: green<br>PW: pure white<br>R: red<br>S: blue<br><br>Use a PW (pure white) LED lamp for yellow illumination. | 1                | SX6S/8×5.4 |
|  |                   |                             |                                    |          | LFTD-5*PN10  |   | 10               |            |
|  | 6V AC/DC±5%       | 7 mA (except S)<br>6 mA (S) | 9 mA (R, A, S, W)<br>10 mA (G, PW) | LFTD-6*  | LFTD-6*      |   | 1                |            |
|  |                   |                             |                                    |          | LFTD-6*PN10  |   | 10               |            |
|  | 12V AC/DC±10%     | 8 mA (except S)<br>7 mA (S) | 9 mA (except S)<br>8 mA (S)        | LFTD-1*  | LFTD-1*      |   | 1                |            |
|  |                   |                             |                                    |          | LFTD-1*PN10  |   | 10               |            |
|  | 24V AC/DC±10%     | 8 mA (except S)<br>7 mA (S) | 9 mA (except S)<br>8 mA (S)        | LFTD-2*  | LFTD-2*      |   | 1                |            |
|  |                   |                             |                                    |          | LFTD-2*PN10  |   | 10               |            |

Replacement LED Lamps for Incandescent Lamps

| Incandescent Lamp   |          |               |              |            | Replacement LED Lamp |   |               |            |
|---|----------|---------------|--------------|------------|----------------------|---|---------------|------------|
| Name & Shape  | Part No. | Rated Voltage | Lamp Ratings | Base       | Part No.             | Color Code  | Rated Voltage | Base       |
|  <p>LH<br/>Glass bulb: ø5<br/>Length: 16</p> | LH-06    | 5V AC/DC      | 0.5W (6V)    | SX6S/8×5.4 | LFTD-6②              | A: amber<br>G: green<br>PW: pure white                  | 6V AC/DC      | SX6S/8×5.4 |
|   | LH-14    | 12V AC/DC     | 0.5W (14V)   |            | LFTD-1②              | R: red<br>S: blue                                       | 12V AC/DC     |            |
|   | LS-28    | 24V AC/DC     | 0.5W (28V)   |            | LFTD-2②              | Use a pure white (PW) lamp for yellow (Y) illumination. | 24V AC/DC     |            |

• When using commercially available incandescent lamps, choose lamps with same dimensions, rated voltage, lamp ratings, and base.

| Name & Shape  | For Use On | Specifications         | Part No.  | Ordering No.  | Package Quantity | Remarks   |
|---|------------|------------------------|-----------|---------------|------------------|---|
|  <p>Color Screen</p> | MC3D       | Full illumination      | MC9Z-PA3* | MC9Z-PA3*PN05 | 1 set (5 pcs)    | Specify a color code in place of * in the Ordering No.<br><br>A: amber<br>C: clear<br>GD: green for LED<br>R: red<br>S: blue<br>Y: yellow<br><br>Use a clear (C) screen for white or pure white illumination. |
|   |            | Horizontal 2-way split | MC9Z-3DB  | MC9Z-3DB      | 1 set            |   |
|   |            | Vertical 2-way split   | MC9Z-3DC  | MC9Z-3DC      | 1 set            |   |
|   |            | Horizontal 3-way split | MC9Z-3DD  | MC9Z-3DD      | 1 set            |   |
|   |            | Vertical 3-way split   | MC9Z-3DE  | MC9Z-3DE      | 1 set            |   |
|   |            | 4-way split            | MC9Z-3DF  | MC9Z-3DF      | 1 set            |   |
|   | MC2D       | Full illumination      | MC9Z-PA2* | MC9Z-PA2*PN05 | 1 set (5 pcs)    |   |
|   |            | Horizontal 2-way split | MC9Z-2DB  | MC9Z-2DB      | 1 set            |   |




Accessories (Dimensions)


All dimensions in mm.

Lens Switch Guard


For MC3D Horizontal (MC9Z-KF3)

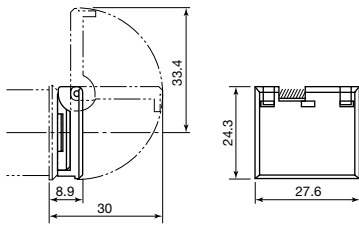

For MC3D Vertical (MC9Z-KT3)

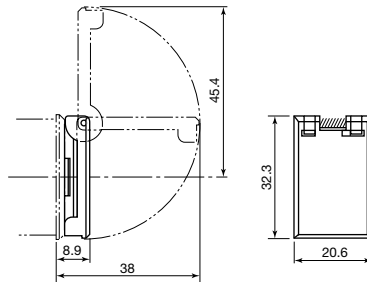


For MC2D (MC9Z-KF2)




Barrier


When using on MC3D Horizontal Flange

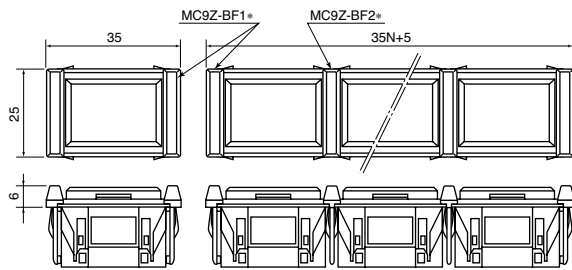

When using on MC3D Vertical Flange

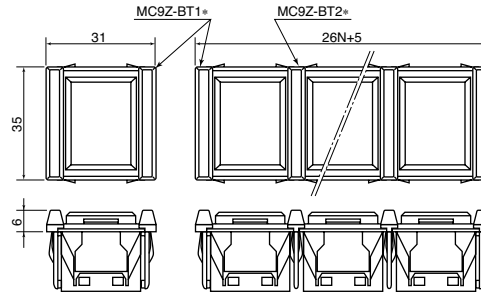


When using on MC2D

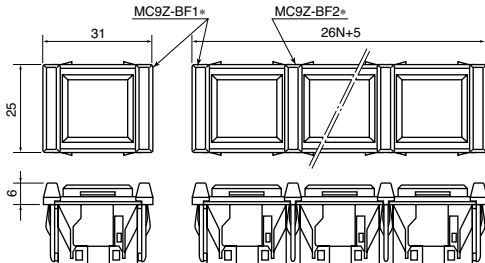


Guard Barrier

When using on MC3D Horizontal Flange

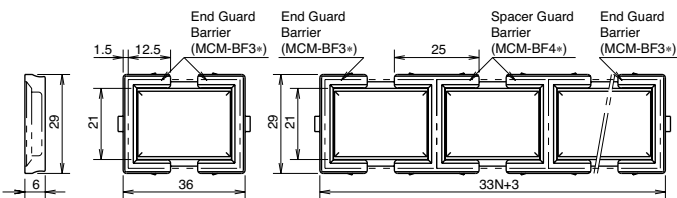


When using on MC2D

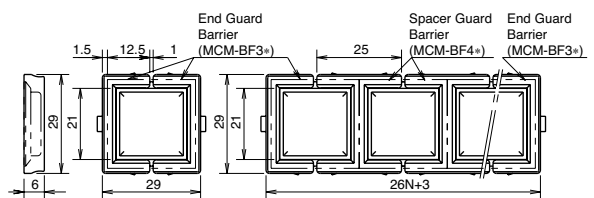


Terminal Cover

For MC3D (MC9Z-VL23)

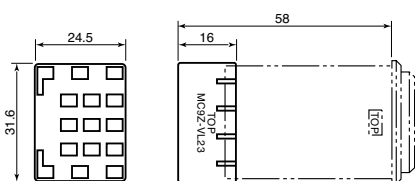

For MC2D (MC9Z-VL22)

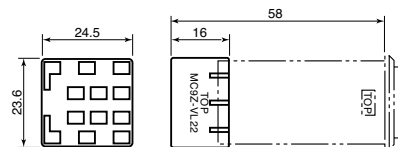


Accessories (Dimensions)

All dimensions in mm.


Socket

For MC3D

With solder terminals (MC9Z-C3)

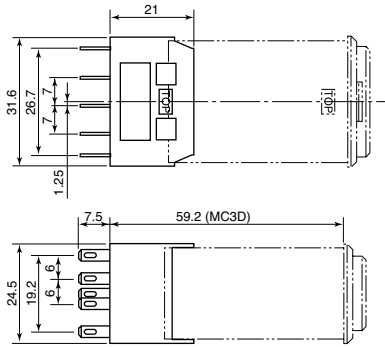


With PC board terminals (MC9Z-C3V)

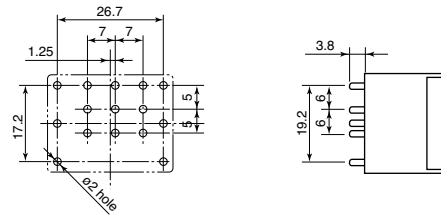


PC Board Drilling Layout (Bottom View)

For MC2D

With solder terminals (MC9Z-C2)

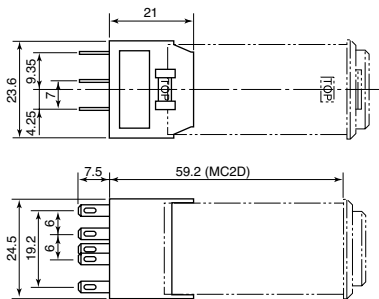


With PC board terminals (MC9Z-C2V)

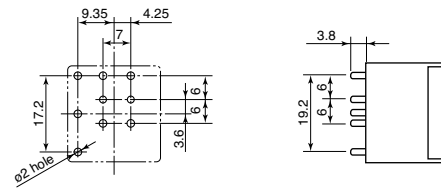


PC Board Drilling Layout (Bottom View)

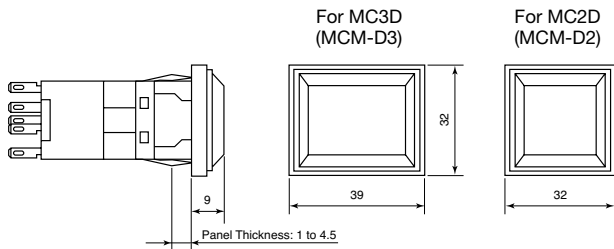


Dustproof Cover

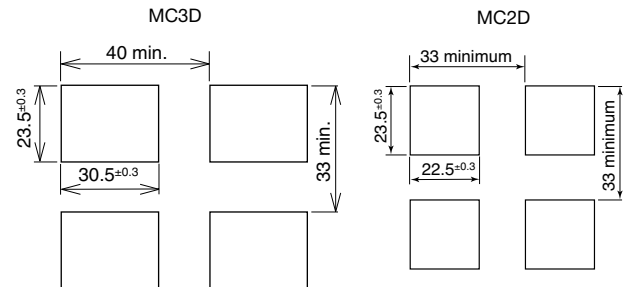

Panel Cut-out



Maintenance Parts

| Name & Shape  | For Use On | Specifications   | Part No. | Ordering No. | Package Quantity | Remarks  |
|---|------------|------------------|----------|--------------|------------------|--|
|  | MC3D       | 17 × 24.8 × 1 mm | MC9Z-P3W | MC9Z-P3WPN05 | 5                | <ul style="list-style-type: none"> <li>Color: white</li> <li>One marking plate is supplied with each MC3D/2D unit.</li> <li>Material: Acryl</li> </ul> |
|   | MC2D       | 17 × 17 × 1 mm   | MC9Z-P2W | MC9Z-P2WPN05 | 5                |  |
|  | MC3D       | 4-way split      | MC9Z-S3  | MC9Z-S3PN05  | 5                | <ul style="list-style-type: none"> <li>Supplied with split color screens.</li> <li>Material: PBT</li> </ul>  |
|   | MC2D       | 2-way split      | MC9Z-S2  | MC9Z-S2PN05  | 5                |  |
|  | MC3D       | —                | MC9Z-L3  | MC9Z-L3PN05  | 5                | <ul style="list-style-type: none"> <li>Material: Polycarbonate</li> </ul>  |
|   | MC2D       | —                | MC9Z-L2  | MC9Z-L2PN05  | 5                |  |

Panel Cut-Out

| Model                      |                 | Front View | Panel Cut-Out |  | Remarks   |
|----------------------------|-----------------|------------|---------------|--|---|
| Barrier                    | MC3D Horizontal |            |               |  | <p>N: No. of MC units mounted</p> <p>Notes:</p> <ul style="list-style-type: none"> <li>• When all four LED lamps are lit continuously, the maximum number of MC3D units that can be mounted is 3 rows by 10 columns.</li> <li>• When both LED lamps are lit continuously, the maximum number of MC2D units that can be mounted is 10 rows by 10 columns.</li> <li>• The panel cut-out dimensions are identical whether the MC3D/MC2D is mounted with or without a dustproof cover. See page 32.</li> <li>• The applicable panel thickness is 1 to 5 mm.</li> <li>• The strength of the panel must be taken into consideration for collective mounting.</li> </ul> |
|                            | MC3D Vertical   |            |               |  |   |
| Flange                     | MC3D Horizontal |            |               |  |   |
|                            | MC3D Vertical   |            |               |  |   |
| Flange with Barriers       | MC2D Horizontal |            |               |  |   |
|                            | MC3D Horizontal |            |               |  |   |
| Flange with Guard Barriers | MC3D Vertical   |            |               |  |   |
|                            | MC2D            |            |               |  |   |
| Flange with Guard Barriers | MC3D Horizontal |            |               |  |   |
|                            | MC2D            |            |               |  |   |

All dimensions in mm.

Ordering Information

Notes for Ordering

•MC3D/2D units are not supplied with LED lamps, and color screens. Order these accessories separately. When ordering, specify the Ordering No. and quantity.

[Example]

- MC3D Horizontal Barrier, Momentary Operation (snap action), Silver Contact, SPDT, Black Housing, Full Illumination  
Part No.: MC3D-M10RB 5 pcs
- LED Lamp (6V AC/DC, Red)  
Part No.: LFTD-6RPN10 1 pack (10 pcs/pack)

- Color Screen (Full, Red)  
Part No.: MC9Z-PA3RPN05 1 pack (5 pcs of the same color)

Other Notes

- Sockets, lens switch guard, barriers, and guard barriers are ordered separately. When ordering these accessories, specify the Ordering Part No. and quantity.
- When using MC3D flange in vertical alignment, order vertical mounting leaf springs (MC9Z-T3) separately, and replace the existing leaf springs on the MC3D vertical flange. See page 35.

Safety Precautions

- Turn power off to the MC series before installation, removal, wiring, maintenance, or inspection. Failure to turn power off may cause electrical shocks or fire hazard.
- Use the MC series within the specification values. Exceeding the specification values may cause electrical shocks or fire hazard.

- Use wires of proper size to meet the voltage and current requirements. Solder the wires correctly to the terminals. Incomplete soldering will cause excessive heating and fire hazard.

Instructions

Illumination Unit


Removing the Illumination Unit

Use the lamp holder removal tool (MCM-T001) to pull out the illumination unit, nipping the slots on the sides of the lens.

If the cover of the lens with switch guard is pulled, the hinge of the cover may be damaged. Pull out the illumination unit, nipping the lens.

Installation and Replacement of LED Lamps

Insert the LED lamp into the lamp receptacle from the rear of the lamp holder, bulb first. Push the lamp in completely.

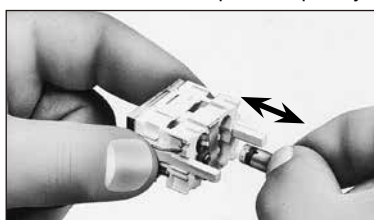

Replacing the Lens


(Removal)

Remove the illumination unit as described above. Insert a flat screwdriver into the latch between the lens and lens holder, and remove the lens.



(Installation)


Put the latches on both sides of the lens onto the latches on the lens holder, and depress the lens surface lightly.

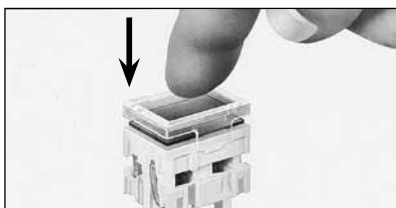

Mounting Order of Color Screen and Marking Plate

Insert the color screen and marking plate in the order described below.

| Illumination Color (Lamp On)      | Display Color (Lamp Off) | Order Insertion |
|-----------------------------------|--------------------------|-----------------|
| Amber, Green, Red<br>Blue, Yellow | Color                    | B               |
| Pure White                        | White                    | A               |
|                                   | White                    | A or B          |

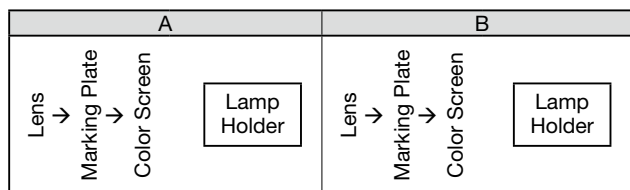

Illumination Color and LED Lamp

Insert the color screen and marking plate in the proper order as described below.

| Illumination Color | Color Screen | LED Lamp   |
|--------------------|--------------|------------|
| Amber              | Amber        | Amber      |
| Red                | Red          | Red        |
| Green              | Green        | Green      |
| Blue               | Blue         | Blue       |
| Yellow             | Yellow       | Yellow     |
| Pure White         | Clear        | Pure White |

- Note:
- Marking plates are identical in material and thickness.
  - Engraving is possible on both marking plates and screens.

Using the Light Barrier

A light barrier is supplied with color plates for split illumination. Use the light barrier according to the required split color illumination.

MC3D (Rectangular)

- [Full Illumination] Light barrier is not needed.
- [2- or 3-way Split] Cut off the unnecessary part using cutting pliers.
- [4-way Split] Use the light barrier for 4-way split illumination as it is.


MC2D (Square)

- [Full Illumination] Light barrier is not needed.
- [2-way Split] Install the light barrier for 2-way horizontal split illumination correctly.

Instructions


**Handling the Light Barrier  
(Replacing the Light Barrier)**

When inserting, note the orientation of the light barrier, illumination unit, and housing.



**(Cutting the Light Barrier)**

Cut off the unnecessary part using cutting pliers.




**Installing the Illumination Unit into the Housing**

The illumination unit has an orientation for insertion into the MC3D/2D housing.


**[MC3D]**

Place the ▲ mark on the lamp holder in the same direction as the TOP marking on the housing, and insert the illumination unit.

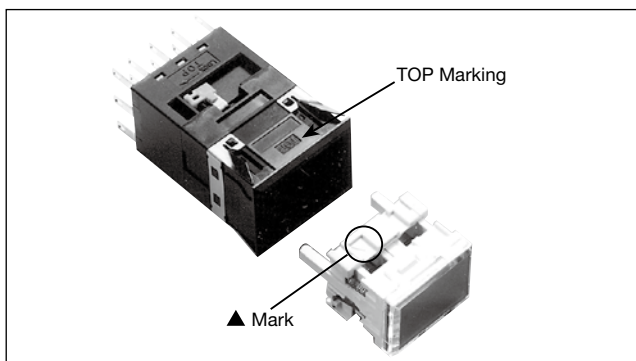


**Vertical Mounting**

First, insert a small flat-blade screwdriver under the leaf spring on the MC unit, and remove the leaf spring for horizontal mounting.




Place the vertical leaf spring on the MC unit temporarily, and then press the spring until it is secured on the MC unit.



**Removing the Contact Block**


**Removal**

Push the yellow lever latch on the top surface of the housing in the direction of arrow using a small screwdriver. The yellow lever latch will rise up. Then turn the lever in the opposite direction indicated with Lock →. The contact block is unlocked and can be removed from the operator housing.



**Installation**


Open the lever as described above, and align the TOP markings on the operator housing and contact block in the same direction. Insert the contact block into the operator housing, and turn the lever in the direction indicated with Lock →. The contact block is locked to the operator housing.

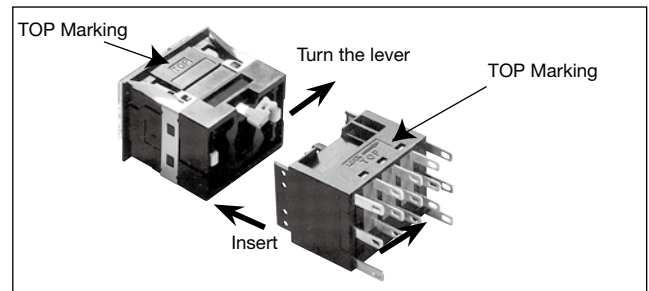

**Installing Accessories**

**Installing the Socket or Terminal Cover**

Align the TOP markings on the operator housing and socket or terminal cover in the same direction, and press the socket or terminal cover toward the housing.

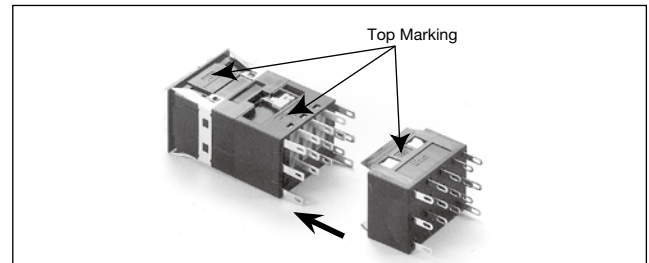


**Installing the Lens with Switch Guard**

The lens with switch guard can be installed and removed as with the standard lens. See Installation and Replacement of LED Lamps on page 34.


**[Single Mounting]**

Put end barriers on both sides of the housing and insert it into the panel cut-out from the front.



**[Row Mounting]**

Insert an end barrier at one end of the panel cutout, then a unit, a spacer barrier, another unit, and so forth up to the other end of the row. With another end barrier in place, insert the last unit before inserting the last spacer barrier.







# Ordering Terms and Conditions

Thank you for using IDEC Products.

By purchasing products listed in our catalogs, datasheets, and the like (hereinafter referred to as "Catalogs") you agree to be bound by these terms and conditions. Please read and agree to the terms and conditions before placing your order.

## 1. Notes on contents of Catalogs

- (1) Rated values, performance values, and specification values of IDEC products listed in this Catalog are values acquired under respective conditions in independent testing, and do not guarantee values gained in combined conditions.  
Also, durability varies depending on the usage environment and usage conditions.
- (2) Reference data and reference values listed in Catalogs are for reference purposes only, and do not guarantee that the product will always operate appropriately in that range.
- (3) The specifications / appearance and accessories of IDEC products listed in Catalogs are subject to change or termination of sales without notice, for improvement or other reasons.
- (4) The content of Catalogs is subject to change without notice.

## 2. Note on applications

- (1) If using IDEC products in combination with other products, confirm the applicable laws / regulations and standards.  
Also, confirm that IDEC products are compatible with your systems, machines, devices, and the like by using under the actual conditions. IDEC shall bear no liability whatsoever regarding the compatibility with IDEC products.
- (2) The usage examples and application examples listed in Catalogs are for reference purposes only. Therefore, when introducing a product, confirm the performance and safety of the instruments, devices, and the like before use. Furthermore, regarding these examples, IDEC does not grant license to use IDEC products to you, and IDEC offers no warranties regarding the ownership of intellectual property rights or non-infringement upon the intellectual property rights of third parties.
- (3) When using IDEC products, be cautious when implementing the following.
  - i. Use of IDEC products with sufficient allowance for rating and performance
  - ii. Safety design, including redundant design and malfunction prevention design that prevents other danger and damage even in the event that an IDEC product fails
  - iii. Wiring and installation that ensures the IDEC product used in your system, machine, device, or the like can perform and function according to its specifications
- (4) Continuing to use an IDEC product even after the performance has deteriorated can result in abnormal heat, smoke, fires, and the like due to insulation deterioration or the like. Perform periodic maintenance for IDEC products and the systems, machines, devices, and the like in which they are used.
- (5) IDEC products are developed and manufactured as general-purpose products for general industrial products. They are not intended for use in the following applications, and in the event that you use an IDEC product for these applications, unless otherwise agreed upon between you and IDEC, IDEC shall provide no guarantees whatsoever regarding IDEC products.
  - i. Use in applications that require a high degree of safety, including nuclear power control equipment, transportation equipment (railroads / airplanes / ships / vehicles / vehicle instruments, etc.), equipment for use in outer space, elevating equipment, medical instruments, safety devices, or any other equipment, instruments, or the like that could endanger life or human health
  - ii. Use in applications that require a high degree of reliability, such as provision systems for gas / waterworks / electricity, etc., systems that operate continuously for 24 hours, and settlement systems
  - iii. Use in applications where the product may be handled or used deviating from the specifications or conditions / environment listed in the Catalogs, such as equipment used outdoors or applications in environments subject to chemical pollution or electromagnetic interference  
If you would like to use IDEC products in the above applications, be sure to consult with an IDEC sales representative.

## 3. Inspections

We ask that you implement inspections for IDEC products you purchase without delay, as well as thoroughly keep in mind management/maintenance regarding handling of the product before and during the inspection.

## 4. Warranty

- (1) Warranty period  
The warranty period for IDEC products shall be one (1) year after purchase or delivery to the specified location. However, this shall not apply in cases where there is a different specification in the Catalogs or there is another agreement in place between you and IDEC.
- (2) Warranty scope  
Should a failure occur in an IDEC product during the above warranty period for reasons attributable to IDEC, then IDEC shall replace or repair that product, free of charge, at the purchase location / delivery location of the product, or an IDEC service base. However, failures caused by the following reasons shall be deemed outside the scope of this warranty.
  - i. The product was handled or used deviating from the conditions / environment listed in the Catalogs
  - ii. The failure was caused by reasons other than an IDEC product
  - iii. Modification or repair was performed by a party other than IDEC
  - iv. The failure was caused by a software program of a party other than IDEC
  - v. The product was used outside of its original purpose
  - vi. Replacement of maintenance parts, installation of accessories, or the like was not performed properly in accordance with the user's manual and Catalogs
  - vii. The failure could not have been predicted with the scientific and technical standards at the time when the product was shipped from IDEC
  - viii. The failure was due to other causes not attributable to IDEC (including cases of force majeure such as natural disasters and other disasters)Furthermore, the warranty described here refers to a warranty on the IDEC product as a unit, and damages induced by the failure of an IDEC product are excluded from this warranty.

## 5. Limitation of liability

The warranty listed in this Agreement is the full and complete warranty for IDEC products, and IDEC shall bear no liability whatsoever regarding special damages, indirect damages, incidental damages, or passive damages that occurred due to an IDEC product.

## 6. Service scope

The prices of IDEC products do not include the cost of services, such as dispatching technicians. Therefore, separate fees are required in the following cases.

- (1) Instructions for installation / adjustment and accompaniment at test operation (including creating application software and testing operation, etc.)
- (2) Maintenance inspections, adjustments, and repairs
- (3) Technical instructions and technical training
- (4) Product tests or inspections specified by you

The above content assumes transactions and usage within your region. Please consult with an IDEC sales representative regarding transactions and usage outside of your region. Also, IDEC provides no guarantees whatsoever regarding IDEC products sold outside your region.

# IDEC CORPORATION

### Head Office

6-64, Nishi-Miyahara-2-Chome, Yodogawa-ku, Osaka 532-0004, Japan

|                  |                                     |                        |                      |
|------------------|-------------------------------------|------------------------|----------------------|
| <b>USA</b>       | IDEC Corporation                    | Tel: +1-408-747-0550   | opencontact@idec.com |
| <b>Germany</b>   | APEM GmbH                           | Tel: +49-40-25 30 54-0 | service@eu.idec.com  |
| <b>Singapore</b> | IDEC Izumi Asia Pte. Ltd.           | Tel: +65-6746-1155     | info@sg.idec.com     |
| <b>Thailand</b>  | IDEC Asia (Thailand) Co., Ltd       | Tel: +66-2-392-9765    | sales@th.idec.com    |
| <b>India</b>     | IDEC Controls India Private Limited | Tel: +91-80679-35328   | info_india@idec.com  |
| <b>Taiwan</b>    | IDEC Taiwan Corporation             | Tel: +886-2-2577-6938  | service@tw.idec.com  |

|                  |                             |                       |                       |
|------------------|-----------------------------|-----------------------|-----------------------|
| <b>Hong Kong</b> | IDEC Izumi (H.K.) Co., Ltd. | Tel: +852-2803-8989   | info@hk.idec.com      |
| <b>China</b>     | IDEC (Shanghai) Corporation | Tel: +86-21-6135-1515 | idec@cn.idec.com      |
|                  | Beijing Branch              | Tel: +86-10-6581-6131 | idec@cn.idec.com      |
|                  | Guangzhou Branch            | Tel: +86-20-8362-2394 | idec@cn.idec.com      |
| <b>Japan</b>     | IDEC Corporation            | Tel: +81-6-6398-2527  | jp_marketing@idec.com |

 [www.idec.com](http://www.idec.com)

Specifications and other descriptions in this brochure are subject to change without notice.

