

Assuring light and small workpieces being released Vacuum cup with Push-rod

NEW



- Suitable for dealing with releasing parts from suction cup and static electricity
- 6 different dia. of vacuum cups are provided

| Vacuum cup dia. (mm) | | | | | |
|----------------------|----|----|----|----|-----|
| ø2.5 | ø3 | ø4 | ø6 | ø8 | ø10 |

- Vacuum cup material

| Material | | | |
|----------|----------|----------|--------------|
| Nitrile | Fluorine | Silicone | ESD Silicone |


Note: Both vacuum source and compressed air are needed to run the product.

Specification

| | | |
|--|----------|---------------------------------------|
| Fluid Media | | Air |
| Service pressure range | Positive | 30kPa ~ 0.5MPa (4.35 ~ 72.5 psi) |
| | Negative | -101kPa ~ -30kPa (-29.8 ~ -8.86 inHg) |
| Service temperature range | | 0 ~ 60°C (32 ~ 140°F) No freezing |
| Suction flow | | 4ℓ/min (0.14CFM) (※) |
| Cracking pressure for push-rod plunger | | 30kPa (4.35 psi) |
| Cracking pressure for vacuum piston | | -30kPa (-8.86 inHg) |

(※) Supplied pressure at -80kPa

Construction

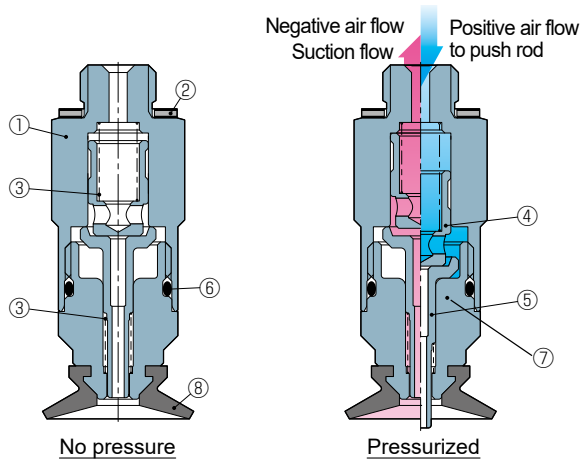


| No. | Parts | Material |
|-----|---------------------|----------------------------|
| ① | Top body | Stainless steel (※) |
| ② | Gasket | SUS304 + NBR or SPCC + NBR |
| ③ | Spring | Stainless steel |
| ④ | Vacuum valve piston | Stainless steel (※) |
| ⑤ | Push-rod plunger | Stainless steel (※) |
| ⑥ | O-ring | NBR |
| ⑦ | Bottom Body | Stainless steel (※) |
| ⑧ | Vacuum cup | Nitrile |
| | | Silicone |
| | | Fluorine |
| | | ESD Silicone |

(※) Anti-corrosivity is equivalent to SUS303, based on Austinitic or Ferritic stainless steel

Activating the push-rod

When the fitting is pressurized, the suction flow valve (Chart ④) and the release valve (push-rod) are pushed down while vacuum release air goes through gap. Then, the tip of push-rod comes out (Chart ⑤), simultaneously push-rod valve (Chart ⑤) sits on the seat of the bottom body of the fitting (Chart ⑦) and blocks the air flow to prevent the workpiece from blowing away.

Mechanism

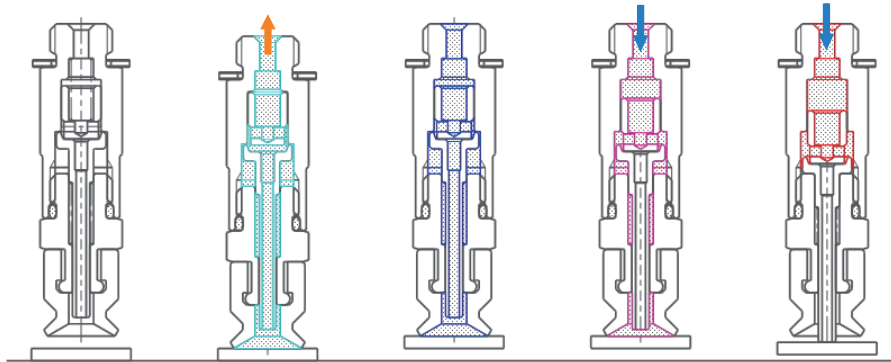

| Status | No pressure | Suction flow | Lifting workpiece | Blow-off air first | Rod pushing workpiece |
|-------------------|---------------------------------|------------------------------------|---|--|--|
| Vacuum pressure | - | ON | ON | - | - |
| Positive pressure | - | - | - | ON | ON |
| Description | Stand-by with the rod drawn-in. | Vacuum low opens the vacuum valve. | As vacuum level gets to the maximum, vacuum flow stops and the vacuum valve closes. | Release air goes through gap to release vacuum | The push rod plunger comes down and the rod pushes the work-piece. The valve blocks the air flow at the same time. |

Remarks

△Caution The product performance may be reduced due to contaminations. Use the product in a clean environment.

△Warning 1. The load of pushing rod is 1N or below (at 0.2MPa). In case there are concerns that it could damage the workpiece, lower the supplied pressure and test it physically.
2. When the product is installed, please refer to the tightening torque listed below. It could cause malfunctions, short life cycles if it was not tightened with the proper torque.

| Thread size | Tightening torque (N·m) |
|-------------|-------------------------|
| M3x0.5 | 0.7 |
| M4x0.7 | 0.9 ~ 1.1 |
| M5x0.8 | 1.0 ~ 1.5 |

Model Designation for Vacuum cup (Example)

VP **6** **Y** **N**

① Vacuum Cup

② Cup size

| Code | 2 | 3 | 4 | 6 | 8 | 10 |
|-----------|------|----|----|----|----|-----|
| Dia. (mm) | ø2.5 | ø3 | ø4 | ø6 | ø8 | ø10 |

③ Cup type

| Code | Y |
|------|------------------|
| Type | Push-Rod Fitting |


④ Cup material

| Code | N | F | S | SE(※) |
|----------|---------|----------|----------|--------------|
| Material | Nitrile | Fluorine | Silicone | ESD Silicone |

※) Code : The volume resistivity of SE (ESD Silicone rubber) is $10^5 \Omega \cdot \text{cm}$ or less

※) All the cups are designed especially for the push-rod release fitting. They can not fit to the regular vacuum fittings.

Dimensions of vacuum cup

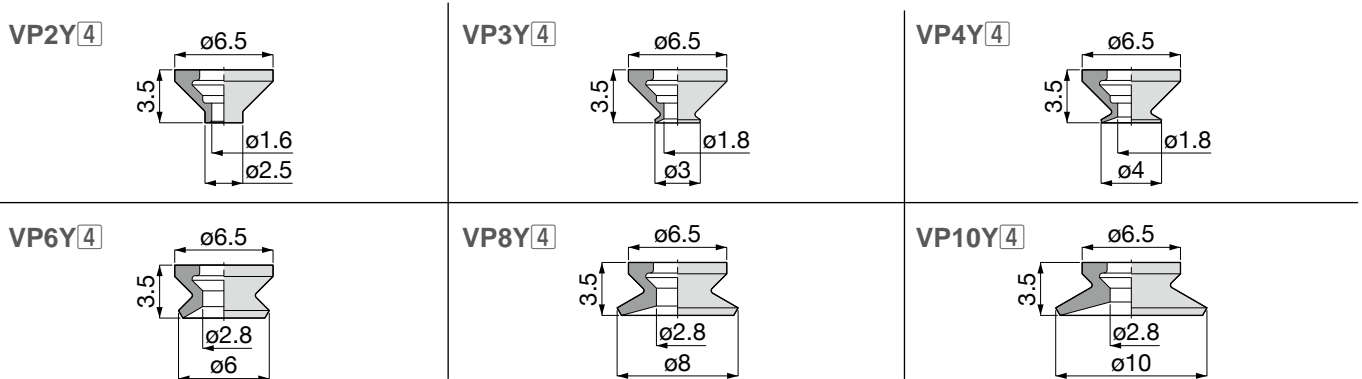

| Model | Price (\$) | | | | | | | | Unit : mm |
|--------|------------|------------|------------|------------|------------|------------|------------|-----|-----------|
| | ④ : N | | ④ : F | | ④ : S | | ④ : SE | | |
| | Weight (g) | Weight (g) | Weight (g) | Weight (g) | Weight (g) | Weight (g) | Weight (g) | | |
| VP2Y④ | 5.45 | 0.1 | 13.18 | 0.1 | 6.82 | 0.1 | 6.82 | 0.1 | |
| VP3Y④ | 5.45 | 0.1 | 13.18 | 0.1 | 6.82 | 0.1 | 6.82 | 0.1 | |
| VP4Y④ | 5.45 | 0.1 | 13.18 | 0.1 | 6.82 | 0.1 | 6.82 | 0.1 | |
| VP6Y④ | 5.45 | 0.1 | 13.18 | 0.1 | 6.82 | 0.1 | 6.82 | 0.1 | |
| VP8Y④ | 5.45 | 0.1 | 13.18 | 0.2 | 6.82 | 0.1 | 6.82 | 0.1 | |
| VP10Y④ | 5.45 | 0.2 | 13.18 | 0.2 | 6.82 | 0.2 | 6.82 | 0.2 | |

Model Designation for Push-Rod Fitting (Example)

VP **KE** **Y4** **-M4**

① Vacuum Cup

② Fitting type

| Code | KE |
|------|-----------------------|
| Type | Push-rod release type |


③ Cup mounting

| Code | Y4 |
|--------|--------------------------------|
| Method | Snap-on type (Direct-mounting) |

④ Thread size

| Code | -M3 | -M4 | -M5 |
|------|--------|--------|--------|
| Size | M3x0.5 | M4x0.7 | M5x0.8 |

Dimensions for Push-Rod Fitting

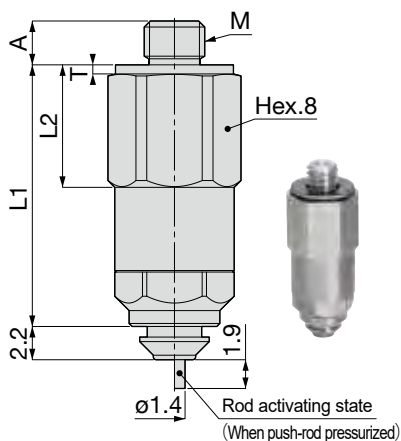

| Model | Mounting thread M | A | L1 | L2 | T | Weight (g) | Price (\$) | Cup Connecting code |
|------------|-------------------|-----|------|-----|-----|------------|------------|---------------------|
| VPKE-Y4-M3 | M3x0.5 | 2.5 | 17.2 | 8 | 0.5 | 5.2 | 22.73 | -Y4 |
| VPKE-Y4-M4 | M4x0.7 | 2.9 | 17.3 | 8.1 | 0.6 | 5.6 | 22.73 | |
| VPKE-Y4-M5 | M5x0.8 | 3 | 16.9 | 7.7 | 0.5 | 5.7 | 22.73 | |

Model Designation for Vacuum cup with Push-rod (Example)

VP **KE** **6** **Y** **N** **-M4**

① Vacuum Cup

②. Fitting type

| Code | KE |
|------|-----------------------|
| Type | Push-rod release type |

③. Cup size

| Code | 2 | 3 | 4 | 6 | 8 | 10 |
|-----------|------|----|----|----|----|-----|
| Dia. (mm) | ø2.5 | ø3 | ø4 | ø6 | ø8 | ø10 |

④. Cup type

| Code | Y |
|------|-----------------------|
| Type | Push-rod release type |


⑤. Cup material

| Code | N | F | S | SE |
|------------------------|---------|----------|----------|--------------------------|
| Material | Nitrile | Fluorine | Silicone | ESD Silicone |
| Vol. resistivity(Ω·cm) | — | — | — | 10 ⁵ or below |

⑥. Thread size

| Code | -M3 | -M4 | -M5 |
|------|--------|--------|--------|
| Size | M3x0.5 | M4x0.7 | M5x0.8 |

Dimensions for Vacuum cup with Push-rod fitting

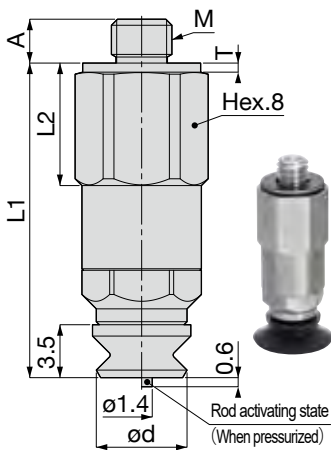

Unit : mm

| Model | Cup dia. ød | Thread M | A | L1 | L2 | T | Price (\$) | | | | Weight (g) | Cup Connect code |
|-------------|----------------|-------------|-----|------|-----|-----|------------|-------|-------|--------|---------------|------------------------|
| | | | | | | | ⑤ : N | ⑤ : F | ⑤ : S | ⑤ : SE | | |
| VPKE2Y⑤-M3 | 2.5 | M3x0.5 | 2.5 | 20.7 | 8 | 0.5 | 28.18 | 35.91 | 29.55 | 29.55 | 5.3 | -Y4 |
| VPKE2Y⑤-M4 | | M4x0.7 | 2.9 | 20.8 | 8.1 | 0.6 | | | | | 5.7 | |
| VPKE2Y⑤-M5 | | M5x0.8 | 3 | 20.4 | 7.7 | 0.5 | | | | | 5.8 | |
| VPKE3Y⑤-M3 | 3 | M3x0.5 | 2.5 | 20.7 | 8 | 0.5 | 28.18 | 35.91 | 29.55 | 29.55 | 5.3 | |
| VPKE3Y⑤-M4 | | M4x0.7 | 2.9 | 20.8 | 8.1 | 0.6 | | | | | 5.7 | |
| VPKE3Y⑤-M5 | | M5x0.8 | 3 | 20.4 | 7.7 | 0.5 | | | | | 5.8 | |
| VPKE4Y⑤-M3 | 4 | M3x0.5 | 2.5 | 20.7 | 8 | 0.5 | 28.18 | 35.91 | 29.55 | 29.55 | 5.3 | |
| VPKE4Y⑤-M4 | | M4x0.7 | 2.9 | 20.8 | 8.1 | 0.6 | | | | | 5.7 | |
| VPKE4Y⑤-M5 | | M5x0.8 | 3 | 20.4 | 7.7 | 0.5 | | | | | 5.8 | |
| VPKE6Y⑤-M3 | 6 | M3x0.5 | 2.5 | 20.7 | 8 | 0.5 | 28.18 | 35.91 | 29.55 | 29.55 | 5.3 | |
| VPKE6Y⑤-M4 | | M4x0.7 | 2.9 | 20.8 | 8.1 | 0.6 | | | | | 5.7 | |
| VPKE6Y⑤-M5 | | M5x0.8 | 3 | 20.4 | 7.7 | 0.5 | | | | | 5.8 | |
| VPKE8Y⑤-M3 | 8 | M3x0.5 | 2.5 | 20.7 | 8 | 0.5 | 28.18 | 35.91 | 29.55 | 29.55 | 5.3(5.4) | |
| VPKE8Y⑤-M4 | | M4x0.7 | 2.9 | 20.8 | 8.1 | 0.6 | | | | | 5.7(5.8) | |
| VPKE8Y⑤-M5 | | M5x0.8 | 3 | 20.4 | 7.7 | 0.5 | | | | | 5.8(5.9) | |
| VPKE10Y⑤-M3 | 10 | M3x0.5 | 2.5 | 20.7 | 8 | 0.5 | 28.18 | 35.91 | 29.55 | 29.55 | 5.4 | |
| VPKE10Y⑤-M4 | | M4x0.7 | 2.9 | 20.8 | 8.1 | 0.6 | | | | | 5.8 | |
| VPKE10Y⑤-M5 | | M5x0.8 | 3 | 20.4 | 7.7 | 0.5 | | | | | 5.9 | |

※) The weight in the bracket () is of FKM material.