


## Streetmaster Cuff

### cast-on/pre-fixed



### Technical Drawing

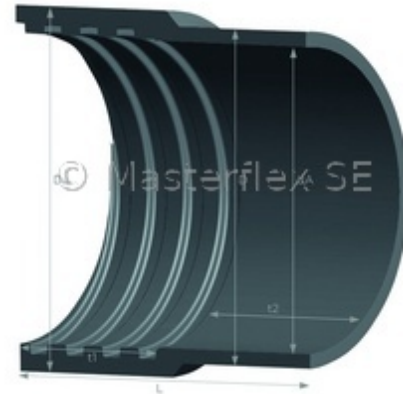

### Material

- wall: polyurethane

### Applications

- cast-on connector cuff for all Streetmaster hoses

### Properties

- abrasion and microbe-resistant
- watertight
- flexible at cold temperatures
- shock-proof
- Fixed version equipped with digital interface as standard. Compatible with the AMPIUS® APP

### Temperature Range

- -40°C to +90°C
- peaks to +125°C

### Product Variations

---

DN hose	dA; outer Ø pipe	total length	weight/piece	article no.
	mm	mm	kg	
200	206	125	1	005643
225	226	125	1,15	005567
250	255	125	1,4	005640
280	281	125	1,4	005641
400	404	150	2,35	005645

All data refers to a medium and ambient temperature of +20 °C.

\* Refers to the inner hose lining

Subject to technical changes and colour deviations.

#### Manufacturing and Delivery

- Made-to-order production in the above nominal sizes, only permanently mounted on Streetmaster hoses.

#### Available on request

- Available in:
- DN 200, 225, 250, 280 and 400
- Exclusively available as pre-fixed version on Streetmaster hoses
- Colour: black