

Multiple Pad Holder

Vacuum Pad Holder to mount multiple Vacuum Pads

PISCO®

>>> <https://www.pisco.co.jp/en/>

⚠ Safety instructions for this product

Safety instructions, Common safety instructions for each product category and Detailed safety instructions for each product are in the end of this catalog and our website.

Model Designation (Example)



(1) Vacuum Pad

(2) Holder type: Multiple Pad Holder

(3) Body size

Code	35	43	50	55	75
Body size (mm)	ø35	ø43	ø50	ø55	ø75

(4) No. of pads & Female thread size

Code	3-M3	4-M3	3-M4	4-M4	3-M6	4-M6	-B
No. of pads	3	4	3	4	3	4	Blank
Size	M3×0.5		M4×0.7		M6×1		(with no hole)
Body size (mm)	ø35		ø43, ø50, ø55, ø75		ø55, ø75		All sizes


(5) Body mounting screw size

Code	M5	M6	M8	M10	M12	M14	G1	G2
Size	M5×0.8	M6×1	M8×1.25	M10×1.5	M12×1.75	M14×2	G1/8A	G1/4A


*Body size dia. 35mm can be mounted only with M5, M6, and M8.

Characteristics

Using multiple pads stabilizes the posture of the work-piece during conveyance.

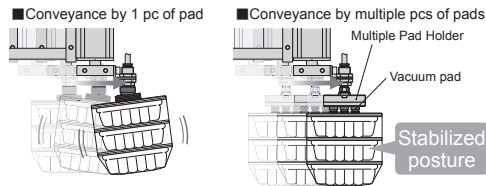

Even a hollow work-piece can be easily suctioned.



Vacuum filter is incorporated.

Removes the suctioned dust and prevent trouble relating to the vacuum system.

Light aluminum is adopted for the body material.

Blank without any holes is also available for users to make holes to cater to applications.

Applicable vacuum pad list

Multiple Pad Holder model code	Body size (mm)	P.C.D to mount pads (mm)	No. of pads	Pad type/size (mm)												
				Standard			Soft	Soft Bellows	Skidproof	Bellows	Multi- bellows	Metal detectable	Ultrathin	Flat, Large Suction Flow	Mark-free	Sponge
				General	Deep	Small										
VPHMP353-M3- [5]	ø35	12	3	ø1 to ø4 (*)2	—	ø0.7 to ø4 (*)3	—	—	—	ø2, ø4 (*)2	—	—	—	—	—	—
VPHMP354-M3- [5]			4	—	—	—	—	—	—	—	—	—	—	—	—	—
VPHMP433-M4- [5]	ø43	19	3	ø1 to ø15 (*)4	ø15	ø0.7 to ø4 (*)4	ø4 to ø15	ø6 to ø15	ø2 to ø15 (*)4	ø6 to ø10	ø10, ø15	ø8 to ø15 (*)4	ø10, ø15	—	—	—
VPHMP434-M4- [5]			4	ø1 to ø10 (*)4	—	—	ø4 to ø10	ø6 to ø10	ø2 to ø10 (*)4	—	—	—	—	—	—	—
VPHMP503-M4- [5]	ø50	26	3	ø1 to ø15 (*)4	—	ø0.7 to ø4 (*)4	ø4 to ø20 (*)4	ø6 to ø20 (*)4	ø2 to ø15 (*)4	ø6 to ø10 (*)4	ø10, ø15	ø8 to ø20 (*)4	ø10, ø15	—	—	—
VPHMP504-M4- [5]			4	—	—	—	—	—	—	—	—	—	—	—	—	—
VPHMP553-M4- [5]	ø55	33	3	ø1 to ø15 (*)4	ø15	ø0.7 to ø4 (*)4	ø4 to ø20 (*)4	ø6 to ø20 (*)4	ø2 to ø15 (*)4	ø6 to ø10 (*)4	ø10, ø15	ø8 to ø20 (*)4	ø10, ø15	—	—	—
VPHMP554-M4- [5]			4	—	—	—	—	—	—	—	—	—	—	—	—	—
VPHMP553-M6- [5]	ø55	31	3	ø1 to ø25 (*)4	ø20, ø25	ø0.7 to ø4 (*)4	ø4 to ø20 (*)4	ø6 to ø20 (*)4	ø20	ø2 to ø25 (*)4	ø6 to ø20 (*)4	ø20	ø8 to ø20 (*)4	ø20, ø25	ø20	ø10 to ø25 (*)4
VPHMP554-M6- [5]			4	ø1 to ø20 (*)4	ø20	—	—	—	—	—	—	—	—	—	—	—
VPHMP753-M4- [5]	ø75	53	3	ø1 to ø15 (*)4	ø15	ø0.7 to ø4 (*)4	ø4 to ø15 (*)4	ø6 to ø20 (*)4	ø2 to ø15 (*)4	ø6 to ø10 (*)4	ø10, ø15	ø8 to ø20 (*)4	ø10, ø15	—	—	—
VPHMP754-M4- [5]			4	—	—	—	—	—	—	—	—	—	—	—	—	—
VPHMP753-M6- [5]	ø75	51	3	ø1 to ø40 (*)4	ø20 to ø40 (*)4	ø0.7 to ø4 (*)4	ø4 to ø40 (*)4	ø6 to ø20 (*)4	ø20, ø30	ø2 to ø40 (*)4	ø6 to ø20 (*)4	ø20	ø8 to ø20 (*)4	ø20 to ø30	ø20, ø30	ø10 to ø35 (*)4
VPHMP754-M6- [5]			4	—	—	—	—	—	—	—	—	—	—	—	—	—

*1. Please select a code for pad from Pad & screw set.

*2. Vacuum holder is VPE type.

*3. Vacuum holder is VPME type.

*4. Conversion adaptors are necessary to mount some sizes. Please contact our sales office for details.

Vacuum Pad


Multiple Pad Holder

RoHS2 (2011/65/EU+EU2015/863) compliant

Product	Model code	Product	Model code	Product	Model code
Multiple Pad Holder 3 pads mounting	VPHMP353-M3-M5	Multiple Pad Holder 4 pads mounting	VPHMP354-M3-M5	Multiple Pad Holder Blank (with no hole)	VPHMP35-B-M5
VPHMP	VPHMP353-M3-M6	VPHMP	VPHMP354-M3-M6	VPHMP	VPHMP35-B-M6
	VPHMP353-M3-M8		VPHMP354-M3-M8		VPHMP35-B-M8
	VPHMP433-M4-M5		VPHMP434-M4-M5		VPHMP43-B-M5
	VPHMP433-M4-M6		VPHMP434-M4-M6		VPHMP43-B-M6
	VPHMP433-M4-M8		VPHMP434-M4-M8		VPHMP43-B-M8
	VPHMP433-M4-M10		VPHMP434-M4-M10		VPHMP43-B-M10
	VPHMP433-M4-M12		VPHMP434-M4-M12		VPHMP43-B-M12
	VPHMP433-M4-M14		VPHMP434-M4-M14		VPHMP43-B-M14
	VPHMP433-M4-G1		VPHMP434-M4-G1		VPHMP43-B-G1
	VPHMP433-M4-G2		VPHMP434-M4-G2		VPHMP43-B-G2
	VPHMP503-M4-M5		VPHMP504-M4-M5		VPHMP50-B-M5
	VPHMP503-M4-M6		VPHMP504-M4-M6		VPHMP50-B-M6
	VPHMP503-M4-M8		VPHMP504-M4-M8		VPHMP50-B-M8
	VPHMP503-M4-M10		VPHMP504-M4-M10		VPHMP50-B-M10
	VPHMP503-M4-M12		VPHMP504-M4-M12		VPHMP50-B-M12
	VPHMP503-M4-M14		VPHMP504-M4-M14		VPHMP50-B-M14
	VPHMP503-M4-G1		VPHMP504-M4-G1		VPHMP50-B-G1
	VPHMP503-M4-G2		VPHMP504-M4-G2		VPHMP50-B-G2
	VPHMP553-M4-M5		VPHMP554-M4-M5		VPHMP55-B-M5
	VPHMP553-M4-M6		VPHMP554-M4-M6		VPHMP55-B-M6
	VPHMP553-M4-M8		VPHMP554-M4-M8		VPHMP55-B-M8
	VPHMP553-M4-M10		VPHMP554-M4-M10		VPHMP55-B-M10
	VPHMP553-M4-M12		VPHMP554-M4-M12		VPHMP55-B-M12
	VPHMP553-M4-M14		VPHMP554-M4-M14		VPHMP55-B-M14
	VPHMP553-M4-G1		VPHMP554-M4-G1		VPHMP55-B-G1
	VPHMP553-M4-G2		VPHMP554-M4-G2		VPHMP55-B-G2
	VPHMP553-M6-M5		VPHMP554-M6-M5		VPHMP75-B-M5
	VPHMP553-M6-M6		VPHMP554-M6-M6		VPHMP75-B-M6
	VPHMP553-M6-M8		VPHMP554-M6-M8		VPHMP75-B-M8
	VPHMP553-M6-M10		VPHMP554-M6-M10		VPHMP75-B-M10
	VPHMP553-M6-M12		VPHMP554-M6-M12		VPHMP75-B-M12
	VPHMP553-M6-M14		VPHMP554-M6-M14		VPHMP75-B-M14
	VPHMP553-M6-G1		VPHMP554-M6-G1		VPHMP75-B-G1
	VPHMP553-M6-G2		VPHMP554-M6-G2		VPHMP75-B-G2
	VPHMP753-M4-M5		VPHMP754-M4-M5		
	VPHMP753-M4-M6		VPHMP754-M4-M6		
	VPHMP753-M4-M8		VPHMP754-M4-M8		
	VPHMP753-M4-M10		VPHMP754-M4-M10		
	VPHMP753-M4-M12		VPHMP754-M4-M12		
	VPHMP753-M4-M14		VPHMP754-M4-M14		
	VPHMP753-M4-G1		VPHMP754-M4-G1		
	VPHMP753-M4-G2		VPHMP754-M4-G2		
	VPHMP753-M6-M5		VPHMP754-M6-M5		
	VPHMP753-M6-M6		VPHMP754-M6-M6		
	VPHMP753-M6-M8		VPHMP754-M6-M8		
	VPHMP753-M6-M10		VPHMP754-M6-M10		
	VPHMP753-M6-M12		VPHMP754-M6-M12		
	VPHMP753-M6-M14		VPHMP754-M6-M14		
	VPHMP753-M6-G1		VPHMP754-M6-G1		
	VPHMP753-M6-G2		VPHMP754-M6-G2		

Packaging specifications
1 pc./bag

Replacement parts

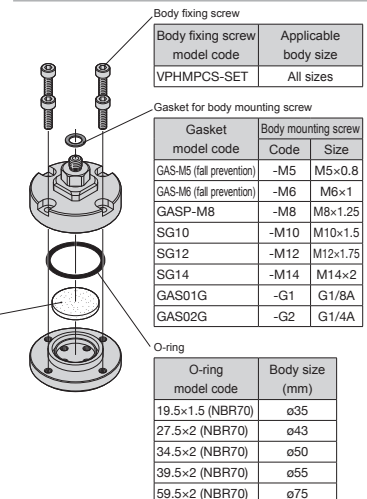


Filter element model code	Body size (mm)
VFFE15	ø35
SFE50	ø43
VFFE30	ø50
SFE70	ø55
SFE100	ø75

Gasket model code	Body mounting screw Code	Size
GAS-M5 (fall prevention)	-M5	M5×0.8
GAS-M6 (fall prevention)	-M6	M6×1
GASP-M8	-M8	M8×1.25
SG10	-M10	M10×1.5
SG12	-M12	M12×1.75
SG14	-M14	M14×2
GAS01G	-G1	G1/8A
GAS02G	-G2	G1/4A

O-ring model code	Body size (mm)
19.5×1.5 (NBR70)	ø35
27.5×2 (NBR70)	ø43
34.5×2 (NBR70)	ø50
39.5×2 (NBR70)	ø55
51.5×2 (NBR70)	ø75

1. PISCO's Vacuum pad series consists of the combination of vacuum pads and holders.

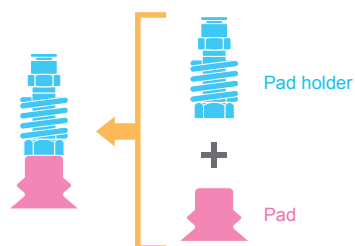


2. Vacuum pad and pad holder have a specific connection type depending on the size and shape.

Pad connection type	Insert type (Direct connection)		Mount type (Direct connection)		Screw type (Connection with screw)	
Connection configuration code	H3		T4 T8			
			T15 T40 (Exclusive to soft type & soft bellows type vacuum pads)		M4 M6 M10 M20	
			PB8 PB15 (Exclusive to Vacuum pad for packaging bag)		G1 G2 G3 G4	
			E10 E20 (Exclusive to Oval type vacuum pad)			

*As shown in above drawings, Vacuum pad and pad holder are connected with a screw or a rim.

3. Any Vacuum pad and pad holder can be connected, as long as their connection configuration codes are same.

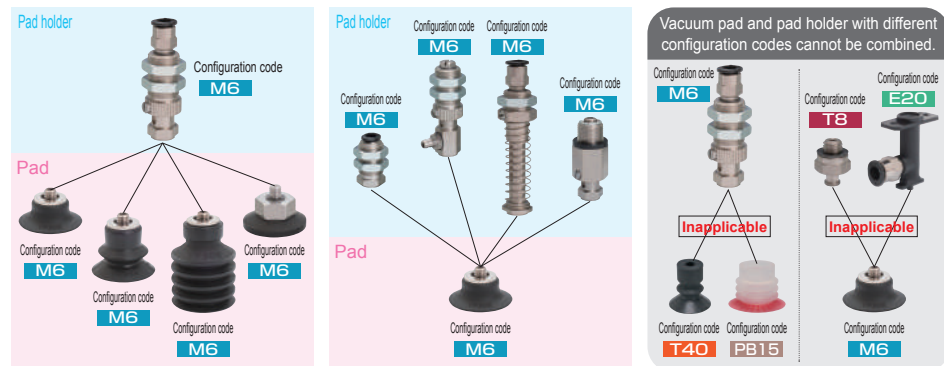

If you have purchased a pad and holder set but want to install a different pad or replace the holder with a different one...
→ Please check the connection configuration code of your pad or pad holder and select the one that matches the configuration code.

4. Please refer to the below chart for the "Connection Configuration Code". *Configuration codes are also listed on the page of model code list for each product.

Connection configuration code list (Holder)

Common holder

	Fixed type		Mini	Slim	Spring type		No cover	Low dust emission
	Mini	Standard			Standard			
Code	VPMA	VPA	VMC	VPSC	VPC	VPOC	VPLFC	
Type								
Configuration code	T4 T8 M4 M6	H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T4 T8 M4 M6	H3 T8	H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T8 M4 M6	T4 T8 M4 M6	
Code	VPMB	VPB	VPMD	—	VPD	VPOD	VPLFD	
Type				—				
Configuration code	T4 T8 M4 M6	H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T4 T8 M4 M6	—	H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T8 M4 M6	T4 T8 M4 M6	
Code	VPME	VPE	—	—	VPF	*Holders with configuration code: G1 to G4 can be connected to VPE holders.		
Type			—	—				
Configuration code	T4 T8 M4 M6	H3 T8 M4 M6 M10 M20 T15 T40	—	—	H3 T8 M4 M6	VPE holder (Male thread: G1, G2, G3, and G4) Vacuum Pad		

Common holder (Lightweight/Low profile)

	Top port		Side port		Dual side port	
	Code	VPHC	Code	VPHD	Code	VPHDW
Type						
Configuration code	T15 T40 M4 M6	T15 T40 M4 M6	T15 T40 M4 M6			
Code	—	VPHE	—	VPHEW	—	—
Type	—		—		—	—
Configuration code	—	T15 T40 M4 M6	—	T15 T40 M4 M6	—	—

Special holder *Pads of other shapes cannot be installed.

	Top port		Side port	
	Code	VPA	Code	VPB
Type				
Configuration code	E10 E20	E10 E20		
Code	VPA	VPE	—	—
Type			—	—
Configuration code	PB8 PB15	PB8 PB15	—	—

Connection configuration code list (Pad) (○: Available)

Pad type or application	Standard														Pad type or application
	Small	General	Deep	Bellows	Multi-bellows	Metal detectable	Skidproof	Pat Large suction flow type	Mark-free	Soft	Soft bellows	Sponge	Ultrathin	For packaging bag	
Code	R	R	A	B	W	BE,BD	K	F,FH	Q	L	LB	S	P	PB	Code
0.7	○	○	○	○	○	○	○	○	○	○	○	○	○	○	2x4
1	○	○	○	○	○	○	○	○	○	○	○	○	○	○	3.5x7
1.5	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x10
2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x10
3	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x10
4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x10
6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x30
8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x30
10	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x30
15	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x30
20	○	○	○	○	○	○	○	○	○	○	○	○	○	○	2x4
25	○	○	○	○	○	○	○	○	○	○	○	○	○	○	3.5x7
30	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x10
35	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x10
40	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x10
50	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x10
60	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x30
70	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x30
80	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x30
100	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x30
150	○	○	○	○	○	○	○	○	○	○	○	○	○	○	2x4
200	○	○	○	○	○	○	○	○	○	○	○	○	○	○	3.5x7

Some combinations are possible by using a conversion screw adapter.

H3, T4 and T8 can be converted to M4 or M6. M4 to M6 conversion is also available. For details, please see "Rearrangement parts" of each pad type.

Model Designation (Example)



(1) Vacuum Pad

(2) Pad size (3) Pad type (6) Connection configuration code *Required for Pad & screw set only. (○: Available)

Pad type or application	Small	General	Deep	Bellows	Multi-bellows	Metal detectable	Skidproof	Flat (Large suction flow type)	Mark-free	Soft	Soft bellows	Sponge	Ultrathin	For packaging bag	Pad type or application
Code	RM	R	A	B	W	BE, BD	K	F, FH	Q	L	LB	S	P	PB	Code
0.7	○	○	○	○	○	○	○	○	○	○	○	○	○	○	2x4
1	○	○	○	○	○	○	○	○	○	○	○	○	○	○	3.5x7
1.5	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x10
2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x10
3	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x10
4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x20
6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x30
8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x30
10	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x30
15	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x20
20	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x30
25	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
30	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
35	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
40	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
50	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
60	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
70	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
80	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
100	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
150	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
200	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

(4) Pad material (○: Available)

Code	N	S	U	F	SE	NE	G	HN	EP	FS	NH	YS2	YS4	MSF3	MSF5	MSS3	MSS5
Rubber material	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	Food Sanit. Act compliant NBR	HNBR	EPDM	Fluoro-silicone	Oil proof NBR	Extra soft silicone	Iron powder type	SUS powder type	Metal detectable silicone		
Pad color	Black	Clear white	Dark blue	Gray	Black	Black	Light gray	Black	Black	Red-orange	Black	Pink	Blue	Reddish-brown	Dark-green	Brown	Green
Material code marking ¹⁾	None	None	None	None	SE	NE	None	HN	EP	None	None	None	None	SF	SF	SS	SS
Standard	General	Deep	Small	RM	○	○	○	○	○	○	○	○	○	○	○	○	○
Soft	L	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Soft bellows	LB	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Skidproof	K	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Bellows	B	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Multi-bellows	W	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
For packaging bag	PB	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Metal Detectable	BE	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Ribs	BD	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Ultrathin	P	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Flat	F	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Flat large suction flow	FH	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Oval	E	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

● Mark-free type (Pad type code: Q)

Code	K	M	KE
Resin material	PEEK	POM	Conductive PEEK
Pad color	Beige	White	Black

● Sponge type (Pad type code: S)

Code	S	C
Rubber material	Silicone	Chloroprene
Pad color	Dark-orange	Black

*1. For vacuum pads in black color (SE: Conductive silicone, NE: Conductive NBR (Low resistance), HN: HNBR and EP: EPDM) and Vacuum pad Metal Detectable type, the pad material code is marked on the top or the side of the vacuum pad for material identification. (The marking on black vacuum pads has started since Oct. 2023 gradually.)



*2. Some materials are not available depending on pad size. Please see the catalog for details.

*3. Pad color of pads for Packaging bag. Lip hardness 20° (Pink) Lip hardness 40° (Blue)

*4. The Conductive Silicone rubber (SE) is a silicon rubber capable of releasing static electricity. (Volume resistance: More than 200 Ω·cm and 10⁵ Ω·cm or less)

*5. Nitrile rubber (N), Conductive NBR (Low resistance, Volume resistance: 200Ω·cm or less) (NE), Food Sanitation Act-compliant NBR (G), Oil proof NBR (NH) are not suitable for use with ozone environment.

*6. Extra soft silicone (YS2/YS4), Metal detectable silicone and Silicone for Packaging bag are compliant with Food Sanitation Act and FDA.

*7. Volume resistance of Conductive PEEK (KE) is 10⁵ to 10⁶ Ω·cm.

(5) Surface treatment (Optional) (○: Available)

Code	No code	-NF	-SF	-DL	-ER	-FG
Surface treatment	None	Fiber surface		DLC. coating	Reformed surface	Fluoro-coating
		Nylon fiber	Silk fiber			
Applicable pad material	—	Silicone (S) Fluoro (F)	Silicone (S) Fluoro (F)	Silicone (S) Fluoro (F) Conductive silicone (SE)	Nitrile (N) Conductive NBR (NE)	Silicone (S) Conductive silicone (SE) Extra soft silicone (YS2, YS4)
Pad type	General	R	—	○	○	○
	Deep	A	—	○	○	○
	Small	RM	—	—	○	○
	Soft	L	—	○	○	○
	Soft bellows	LB	—	○	○	○
	Skidproof	K	—	—	—	—
	Bellows	B	—	○	○	○
	Multi-bellows	W	—	—	○	○
	For packaging bag	PB	—	—	—	○
	Metal Detectable	BE, BD	—	—	—	—
	Ultrathin	P	—	—	○	○
	Flat	F	—	—	○	○
	Flat large suction flow	FH	—	—	○	○
	Mark-free	Q	—	—	—	—
	Sponge	S	—	—	—	—
	Oval	E	—	—	○	○

*Some surface treatments are not available depending on pad size.

Please refer to page 370 for the details of each pad surface type and treatment for Suction Mark-free.

(6) Connection configuration code (Required for Pad & screw set only.) Please refer to the Pad size and type list on the 374 page.

Code	No code	-M4	-M6	-M10	-M20	-M5(*)
Connection config. code	—	M4	M6	M10	M20	—
Thread size	Pad rubber only	M4×0.7	M6×1	M10×1.5	M20×2	M5×0.8

*M5 thread is used for mounting on non-PISCO holders. Contact us for the price of screw set.

(7) Mark-free resin attachment material (Bellows type only) (Optional)

Code	No code	-QK	-QM	-QKE
Resin material	—	PEEK	POM	Conductive PEEK (Volume resistance: 10 ⁵ to 10 ⁶ Ω·cm)
	—			

*1. Selectable for Bellows type pad dia. 10 to 30 mm.

*2. Resin attachment cannot be installed when selecting surface treatment.

*3. Resin attachment cannot be installed when selecting Extra soft silicone for pad material.

(8) -S3 spec. (Required for Pad & screw set only) (Optional)

Code	No code	-S3
Metal material	Standard	No copper-based metallic materials used in flow paths

Vacuum pad / Pad & screw set

Holders with the same "connection configuration code (M4, M6 etc.)" can be connected. For connectable holders, please see the page of Pad holder only (page 384).



Standard series, General type (R) and Deep type (A)

Vacuum pad alone

Model code	○: Available as standard item								Connection config. code	
	[4] Pad rubber material									
	N	S	U	F	SE	NE	G	HN		EP
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	Food Sant. Act compliant NBR	HNBR		EPDM
VP1R[4]	○	○	○	○	○	○	○	○	○	
VP2R[4]	○	○	○	○	○	○	○	○	○	H3
VP3R[4]	○	○	○	○	○	○	○	○	○	
VP4R[4]	○	○	○	○	○	○	○	○	○	
VP6R[4]5	○	○	○	○	○	○	○	○	○	TB
VP8R[4]5	○	○	○	○	○	○	○	○	○	
VP10R[4]5	○	○	○	○	○	○	○	○	○	
VP15R(A)[4]5	●	●	●	●	●	●	●	●	●	M4(3)
VP20R(A)[4]5	●	●	●	●	●	●	●	●	●	
VP25R(A)[4]5	●	●	●	●	●	●	●	●	●	
VP30R(A)[4]5	●	●	●	●	●	●	●	●	●	M6(3)
VP40R(A)[4]5	●	●	●	●	●	●	●	●	●	
VP50R(A)[4]5	●	●	●	●	●	●	●	●	●	
VP60R(A)[4]5	●	●	●	○	●	●	—	●	●	
VP80R(A)[4]5	●	●	●	○	○	●	—	●	●	M10(3)
VP100R(A)[4]5	●	●	●	○	○	●	—	●	●	
VP150R[4]5	○	○	○	○	○	○	—	○	○	
VP200R[4]5	○	○	○	○	○	○	—	○	○	M20(3)

Available pad size and material for surface treatment (Standard series, General type & Deep type)

Pad dia. (mm)	[5] Surface treatment code				
	-NF	-SF	-DL	-ER	-FG
	Fiber surface	DLC	Reformed surface	Fluoro-coating	
	Nylon	Silk			
ø6	—	—	○	○	○
ø8	—	—	○	○	○
ø10	—	—	○	○	○
ø15	●	●	●	●	●
ø20	●	●	●	●	●
ø25	●	●	●	●	●
ø30	●	●	●	●	●
ø40	●	●	●	●	●
ø50	●	●	●	●	●
ø60	●	●	—	—	—
ø80	●	●	—	—	—
ø100	—	—	—	—	—
ø150	—	—	—	—	○
ø200	—	—	—	—	○
Material	S, F	S, F, SE	N, NE	S, SE	



Standard series, General type (R) and Deep type (A) Pad & screw set

 P.406											
Model code	○: Available as standard item										Connection config. code
	[4] Pad rubber material									[8]	
	N	S	U	F	SE	NE	G	HN	EP	-S3	
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	Food Sanit. Act compliant NBR	HNBR	EPDM	-S3 spec.	
VP10R[A]4[5]-M4[8]	○	○	○	○	○	○	○	○	○	○	M4
VP15R(A)4[5]-M4[8]	●	●	●	●	●	●	●	●	●	○	
VP20R(A)4[5]-M6[8]	●	●	●	●	●	●	●	●	●	○	
VP25R(A)4[5]-M6[8]	●	●	●	●	●	●	●	●	●	○	M6
VP30R(A)4[5]-M6[8]	●	●	●	●	●	●	●	●	●	○	
VP40R(A)4[5]-M6[8]	●	●	●	●	●	●	●	●	●	○	
VP50R(A)4[5]-M6[8]	●	●	●	●	●	●	●	●	●	○	M10
VP60R(A)4[5]-M10	●	●	●	●	○	○	—	●	●	*2	
VP80R(A)4[5]-M10[8]	●	●	●	●	○	○	—	●	●	○	
VP100R(A)4[5]-M10[8]	●	●	●	●	○	○	—	●	●	○	M20
VP150R4[5]-M20[8]	○	○	○	○	○	○	—	○	○	○	
VP200R4[5]-M20[8]	○	○	○	○	○	○	—	○	○	○	


P.406



Standard series, Small type Vacuum pad alone

Model code	○: Available as standard item								Connection config. code	
	[4] Pad rubber material									
	N	S	U	F	SE	NE	G	HN		EP
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	Food Sant. Act compliant NBR	HNBR		EPDM
VP0.7RM[4]5	○	○	○	○	○	○	○	○	○	
VP1RM[4]5	○	○	○	○	○	○	○	○	○	
VP1.5RM[4]5	○	○	○	○	○	○	○	○	○	
VP2RM[4]5	○	○	○	○	○	○	○	○	○	
VP3RM[4]5	○	○	○	○	○	○	○	○	○	
VP4RM[4]5	○	○	○	○	○	○	○	○	○	

T4

- Notes
- *1. For ● part in the table above, deep type of standard series is available.
- *2. For Pad & screw set of 60 mm pad dia. (for general type and deep type), the standard spec. is equivalent to "-S3" spec.
- *3. A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
- *4. Configuration code: H3 is not available for surface treatment.

CAD data is available at PISCO website.

Packaging specifications 1 pc./bag

Options

[5]: Surface treatment [8]: -S3 ⇒ -S3 spec.

Holders with the same "connection configuration code (M4, M6 etc.)" can be connected. For connectable holders, please see the page of Pad holder only (page 384).



Soft series,
Pad rubber alone

P.446



Soft series,
Pad & screw set

P.446

Model code	○: Available as standard item					Connection config. code	Model code	○: Available as standard item						Connection config. code	
	[4] Pad rubber material							[4] Pad rubber material							[8]
	N	S	FS	SE	NE			N	S	FS	SE	NE	-S3		
	Nitrile	Silicone	Fluoro silicone	Conductive silicone	Conductive NBR (Low resistance)			Nitrile	Silicone	Fluoro silicone	Conductive silicone	Conductive NBR (Low resistance)	-S3 spec.		
VP4L[4]5	○	○	○	○	○	T15 M4(*)	VP4L[4]5-M4[8]	○	○	○	○	○	○	M4	
VP6L[4]5	○	○	○	○	○		VP6L[4]5-M4[8]	○	○	○	○	○	○		
VP8L[4]5	○	○	○	○	○		VP8L[4]5-M4[8]	○	○	○	○	○	○		
VP10L[4]5	○	○	○	○	○		VP10L[4]5-M4[8]	○	○	○	○	○	○		
VP15L[4]5	○	○	○	○	○	T40 M6(*)	VP15L[4]5-M4[8]	○	○	○	○	○	○	M6	
VP20L[4]5	○	○	○	○	○		VP20L[4]5-M6[8]	○	○	○	○	○	○		
VP30L[4]5	○	○	○	○	○		VP30L[4]5-M6[8]	○	○	○	○	○	○		
VP40L[4]5	○	○	○	○	○		VP40L[4]5-M6[8]	○	○	○	○	○	○		



Soft bellows series, Pad rubber alone

Model code	○: Available as standard item							Connection config. code
	[4] Pad rubber material							
	N	S	U	SE	NE	HN	EP	
	Nitrile	Silicone	Urethane	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM	
VP6LB[4]5	○	○	○	○	○	○	○	T15 M4[8]
VP8LB[4]5	○	○	○	○	○	○	○	
VP10LB[4]5	○	○	○	○	○	○	○	
VP15LB[4]5	○	○	○	○	○	○	○	T40 M6[8]
VP20LB[4]5	○	○	○	○	○	○	○	



P.48

 Soft bellows series, Pad & screw set	○: Available as standard item										Connection config. code M4 M6
	Model code	[4] Pad rubber material							[8]		
		N	S	U	SE	NE	HN	EP	-S3		
		Nitrile	Silicone	Urethane	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM	-S3 spec.		
		VP6LB[4]5-M4[8]	○	○	○	○	○	○	○	○	
VP8LB[4]5-M4[8]	○	○	○	○	○	○	○	○			
VP10LB[4]5-M4[8]	○	○	○	○	○	○	○	○			
VP15LB[4]5-M4[8]	○	○	○	○	○	○	○	○			
VP20LB[4]5-M6[8]	○	○	○	○	○	○	○	○			

 Skidproof series, Pad rubber alone							 Skidproof series, Pad & screw set								
Model code	○: Available as standard item					Connection config. code	Model code	○: Available as standard item						Connection config. code	
	[4] Pad rubber material							[4] Pad rubber material							[8]
	NH	S	U	F	NE			NH	S	U	F	NE	-S3		
	Oil proof NBR	Silicone	Urethane	Fluoro	Conductive NBR (Low resistance)			Oil proof NBR	Silicone	Urethane	Fluoro	Conductive NBR (Low resistance)	-S3 spec.		
VP10K[4]	○	○	○	○	○	M4(*)	VP10K[4]-M4[8]	○	○	○	○	○	○	M4	
VP20K[4]	○	○	○	○	○		VP20K[4]-M6[8]	○	○	○	○	○	○		
VP30K[4]	○	○	○	○	○	M6(*)	VP30K[4]-M6[8]	○	○	○	○	○	○	M6	
VP40K[4]	○	○	○	○	○		VP40K[4]-M6[8]	○	○	○	○	○	○		
VP50K[4]	○	○	○	○	○		VP50K[4]-M6[8]	○	○	○	○	○	○		

- Notes
- *A screw adapter (Soft/Soft bellows series) or a pad screw (Skidproof series) is required to mount on the holder. If you do not have a screw adapter and a pad screw, please select from the Pad & screw set.
- CAD data is available at PISCO website.
- Packaging specifications 1 pc./bag
- Options
- [5]: Surface treatment [8]: -S3 ⇒ -S3 spec.

Vacuum pad / Pad & screw set

Holders with the same "connection configuration code" (M4, M6, etc.) can be connected. For connectable holders, please see the page of Pad holder only (page 384-).

Flat series, Pad rubber alone							Flat series, Pad & screw set						
○: Available as standard item							○: Available as standard item						
[4] Pad rubber material							[4] Pad rubber material						
Model code	N	S	U	F	SE	NE	Model code	N	S	U	F	SE	NE
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)		Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)
VP10F[4][5]	○	○	○	○	○	○	VP10F[4][5]-M4[8]	○	○	○	○	○	○
VP15F[4][5]	○	○	○	○	○	○	VP15F[4][5]-M4[8]	○	○	○	○	○	○
VP20F[4][5]	○	○	○	○	○	○	VP20F[4][5]-M6[8]	○	○	○	○	○	○
VP25F[4][5]	○	○	○	○	○	○	VP25F[4][5]-M6[8]	○	○	○	○	○	○
VP30F[4][5]	○	○	○	○	○	○	VP30F[4][5]-M6[8]	○	○	○	○	○	○

Flat large suction flow series, Pad rubber alone							Flat large suction flow series, Pad & screw set						
○: Available as standard item							○: Available as standard item						
[4] Pad rubber material							[4] Pad rubber material						
Model code	N	S	F	SE	NE		Model code	N	S	F	SE	NE	-S3
	Nitrile	Silicone	Fluoro	Conductive silicone	Conductive NBR (Low resistance)			Nitrile	Silicone	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	-S3 spec.
VP10FH[4][5]	○	○	○	○	○		VP10FH[4][5]-M4[8]	○	○	○	○	○	○
VP15FH[4][5]	○	○	○	○	○		VP15FH[4][5]-M4[8]	○	○	○	○	○	○
VP20FH[4][5]	○	○	○	○	○		VP20FH[4][5]-M6[8]	○	○	○	○	○	○
VP25FH[4][5]	○	○	○	○	○		VP25FH[4][5]-M6[8]	○	○	○	○	○	○
VP30FH[4][5]	○	○	○	○	○		VP30FH[4][5]-M6[8]	○	○	○	○	○	○

Mark-free series, Resin pad alone							Mark-free series, with Flexible Swing Joint						
○: Available as standard item							○: Available as standard item						
[4] Pad rubber material							[4] Pad rubber material						
Model code	K	M	KE				Model code	K	M	KE	-S3		
	PEEK	POM	Conductive PEEK					PEEK	POM	Conductive PEEK	-S3 spec.		
VP10Q[4]	○	○	○				VP10Q[4]-M4[8]	○	○	○			
VP20Q[4]	○	○	○				VP20Q[4]-M6[8]	○	○	○			
VP30Q[4]	○	○	○				VP30Q[4]-M6[8]	○	○	○			

Sponge series, Pad rubber alone							Sponge series, Pad & screw set						
○: Available as standard item							○: Available as standard item						
[4] Pad rubber material							[4] Pad rubber material						
Model code	C	S					Model code	C	S	-S3			
	Chloroprene	Silicone						Chloroprene	Silicone	-S3 spec.			
VP10S[4]	○	○					VP10S[4]-M6[8]	○	○	○			
VP15S[4]	○	○					VP15S[4]-M6[8]	○	○	○			
VP20S[4]	○	○					VP20S[4]-M6[8]	○	○	○			
VP25S[4]	○	○					VP25S[4]-M6[8]	○	○	○			
VP30S[4]	○	○					VP30S[4]-M6[8]	○	○	○			
VP35S[4]	○	○					VP35S[4]-M6[8]	○	○	○			
VP50S[4]	○	○					VP50S[4]-M6[8]	○	○	○			
VP70S[4]	○	○					VP70S[4]-M10	○	○	(*)			
VP100S[4]	○	○					VP100S[4]-M10	○	○	(*)			

- Notes**
- *1. A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
- *2. A Flexible Swing Joint is required to mount on the holder. If you do not have a Flexible Swing Joint, please select from the Mark-free series, with Flexible Swing Joint set.
- *3. For Pad & screw set of Sponge series 70 mm and 100 mm pad dia., the standard spec. is equivalent to "-S3" spec.

CAD data is available at PISCO website.

Packaging specifications 1 pc./bag

Options [5]: Surface treatment [8]: -S3 ⇒ -S3 spec.

Available pad size and material for surface treatment (Flat + Flat large flow series)

Pad dia. (mm)	-DL	-ER	-FG
	DLC coating	Reformed surface	Fluoro-coating
ø10	○	○	○
ø15	○	○	○
ø20	○	○	○
ø25	○	○	○
ø30	○	○	○
Material	S, F, SE	N, NE	S, SE

Holders with the same "connection configuration code" (E10, E20, etc.) can be connected. For connectable holders, please see the page of Pad holder only (page 384-).

Oval series, Pad rubber alone												
○: Available as standard item												
[4] Pad rubber material												
Model code	N	S	U	F	SE	NE	HN	EP				
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM				
VP2×4E[4][5]	○	○	○	○	○	○	○	○				
VP3.5×7E[4][5]	○	○	○	○	○	○	○	○				
VP4×10E[4][5]	○	○	○	○	○	○	○	○				
VP4×20E[4][5]	○	○	○	○	○	○	○	○				
VP4×30E[4][5]	○	○	○	○	○	○	○	○				
VP5×10E[4][5]	○	○	○	○	○	○	○	○				
VP5×20E[4][5]	○	○	○	○	○	○	○	○				
VP5×30E[4][5]	○	○	○	○	○	○	○	○				
VP6×10E[4][5]	○	○	○	○	○	○	○	○				
VP6×20E[4][5]	○	○	○	○	○	○	○	○				
VP6×30E[4][5]	○	○	○	○	○	○	○	○				
VP8×20E[4][5]	○	○	○	○	○	○	○	○				
VP8×30E[4][5]	○	○	○	○	○	○	○	○				

Oval series, Pad & screw set												
○: Available as standard item												
[4] Pad rubber material												
Model code	N	S	U	F	SE	NE	HN	EP	-S3			
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM	-S3 spec.			
VP2×4E[4][5]-M6[8]	○	○	○	○	○	○	○	○	○			
VP3.5×7E[4][5]-M6[8]	○	○	○	○	○	○	○	○	○			
VP4×10E[4][5]-M6[8]	○	○	○	○	○	○	○	○	○			
VP4×20E[4][5]-M6[8]	○	○	○	○	○	○	○	○	○			
VP4×30E[4][5]-M6[8]	○	○	○	○	○	○	○	○	○			
VP5×10E[4][5]-M6[8]	○	○	○	○	○	○	○	○	○			
VP5×20E[4][5]-M6[8]	○	○	○	○	○	○	○	○	○			
VP5×30E[4][5]-M6[8]	○	○	○	○	○	○	○	○	○			
VP6×10E[4][5]-M6[8]	○	○	○	○	○	○	○	○	○			
VP6×20E[4][5]-M6[8]	○	○	○	○	○	○	○	○	○			
VP6×30E[4][5]-M6[8]	○	○	○	○	○	○	○	○	○			
VP8×20E[4][5]-M6[8]	○	○	○	○	○	○	○	○	○			
VP8×30E[4][5]-M6[8]	○	○	○	○	○	○	○	○	○			


- Notes**
- *A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
- CAD data is available at PISCO website.
- Packaging specifications 1 pc./bag
- Options [5]: Surface treatment [8]: -S3 ⇒ -S3 spec.

Available pad size and material for surface treatment (Oval series)


Pad dia. (mm)	-DL	-ER	-FG
	DLC coating	Reformed surface	Fluoro-coating
2×4	○	○	○
3.5×7	○	○	○
4×10	○	○	○
4×20	○	○	○
4×30	○	○	○
5×10	○	○	○
5×20	○	○	○
5×30	○	○	○
6×10	○	○	○
6×20	○	○	○
6×30	○	○	○
8×20	○	○	○
8×30	○	○	○
Material	S, F, SE	N, NE	S, SE

Vacuum Pad Configuration


Pad dia. : $\phi 0.7, \phi 1, \phi 1.5, \phi 2, \phi 3, \phi 4$ mm

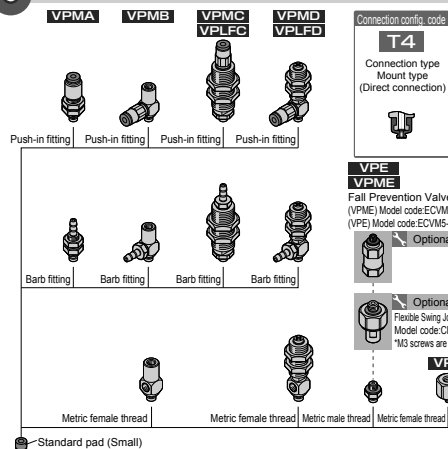



Pad dia. : $\phi 1, \phi 2, \phi 3, \phi 4$ mm

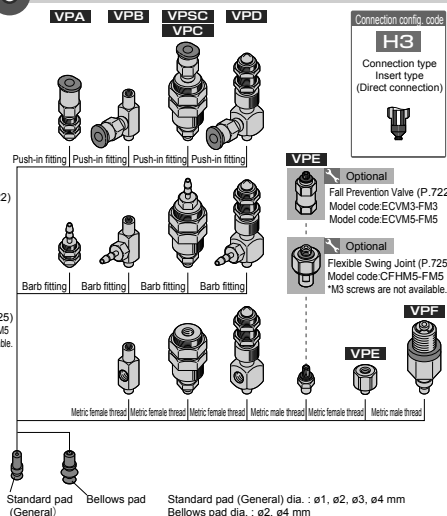

Pad dia. : $\phi 6, \phi 8, \phi 10, \phi 15, \phi 20$ mm

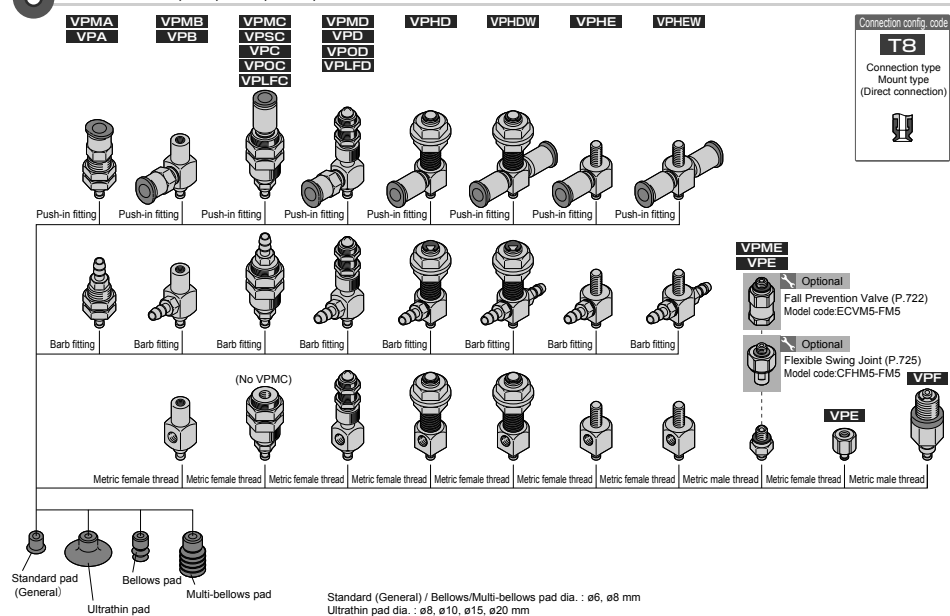

Pad dia. : $\phi 4, \phi 6, \phi 8, \phi 10, \phi 15$ mm

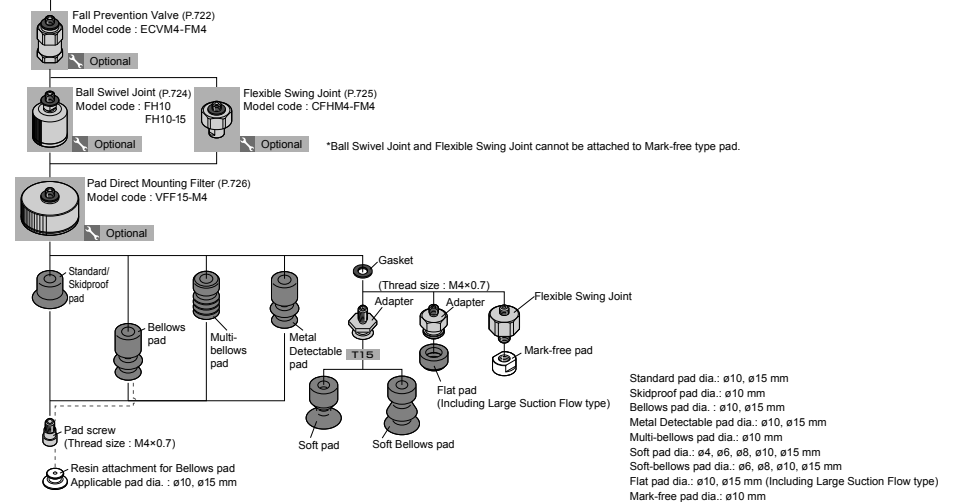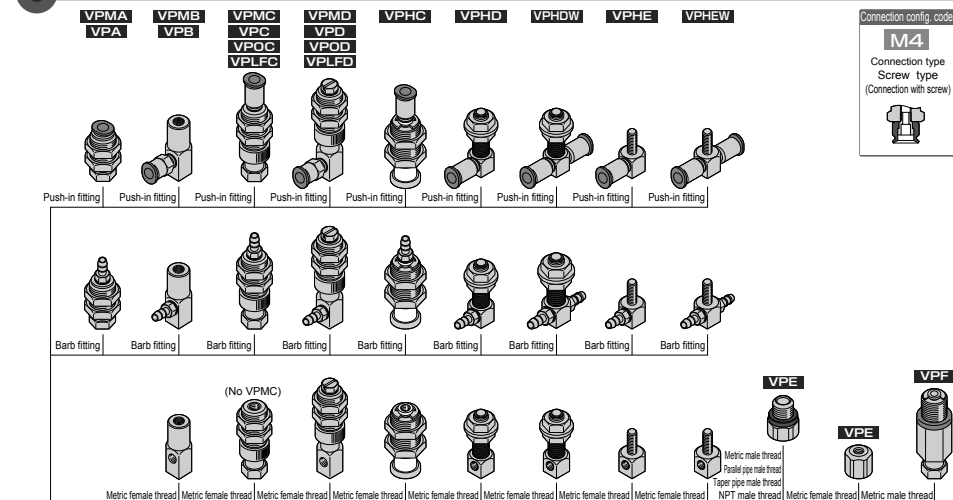

Vacuum Pad Configuration

Pad dia. : ø4, ø6, ø8, ø10, ø15 mm (Exclusive to Soft and Soft Bellows type)

VPHC

Push-in fitting

VPHD

Push-in fitting

VPHDW

Push-in fitting

VPHE

Push-in fitting

VPHEW

Push-in fitting

Barb fitting

Barb fitting

Barb fitting

Barb fitting

Barb fitting

Metric female thread

Metric female thread

Metric female thread

Metric female thread

Metric female thread

Metric male thread

Parallel pipe male thread

Taper pipe male thread

NPT male thread

Metric female thread

Soft pad

Soft Bellows pad

Soft pad dia. : ø4, ø6, ø8, ø10, ø15 mm

Soft-bellows pad dia. : ø6, ø8, ø10, ø15 mm

Connection config. code

T15

Connection type

Mount type

(Direct connection)

Pad dia. : ø20, ø30, ø40 mm (Exclusive to Soft and Soft Bellows type)

VPHC

Push-in fitting

VPHD

Push-in fitting

VPHDW

Push-in fitting

VPHE

Push-in fitting

VPHEW

Push-in fitting

Barb fitting

Barb fitting

Barb fitting

Barb fitting

Barb fitting

Metric female thread

Metric female thread

Metric female thread

Metric female thread

Metric female thread

Metric male thread

Parallel pipe male thread

Taper pipe male thread

NPT male thread

Metric female thread

Soft pad

Soft Bellows pad

Soft pad dia. : ø20, ø30, ø40 mm

Soft-bellows pad dia. : ø20 mm

Connection config. code

T40

Connection type

Mount type

(Direct connection)

Pad dia. : ø20, ø25 mm (Exclusive to Vacuum pad for packaging bag)

VPA

Push-in fitting

VPE

Metric male thread

VPE

Parallel pipe male thread

VPE

O-ring

Packaging bag pad 3 convolutions

Packaging bag pad 5 convolutions

Over-suction preventing adapter Spherical type

Over-suction preventing adapter Plane type

Over-suction preventing adapter Spherical type With stainless steel mesh

Over-suction preventing adapter Plane type With stainless steel mesh

Connection config. code

PB8

Connection type

Mount type

(Direct connection)

Pad dia. : ø30, ø40, ø50 mm (Exclusive to Vacuum pad for packaging bag)

VPA

Push-in fitting

VPE

Metric male thread

VPE

Parallel pipe male thread

VPE

O-ring

Packaging bag pad 3 convolutions

Packaging bag pad 5 convolutions

Over-suction preventing adapter Spherical type

Over-suction preventing adapter Plane type

Over-suction preventing adapter Spherical type With stainless steel mesh

Over-suction preventing adapter Plane type With stainless steel mesh

Connection config. code

PB15

Connection type

Mount type

(Direct connection)

Pad size : 2×4, 3.5×7, 4 to 6×10 mm (Exclusive to Oval type)

VPAE

Push-in fitting

VPBE

Push-in fitting

Barb fitting

Barb fitting

Metric female thread

Metric female thread

Oval pad

Connection config. code

E10

Connection type

Mount type

(Direct connection)

Pad size : 4 to 8×20 mm, 4 to 8×30 mm (Exclusive to Oval type)

VPAE

Push-in fitting

VPBE

Push-in fitting

Barb fitting

Barb fitting

Metric female thread

Metric female thread

Oval pad

Connection config. code

E20

Connection type

Mount type

(Direct connection)