

Rotary Vacuum Pump Series

Vacuum pumps with special shaped rotor



Renewal

>>> <https://www.pisco.co.jp/en/>

⚠ Safety instructions for this product

Safety instructions, Common safety instructions for each product category and Detailed safety instructions for each product are in the end of this catalog and our website.

Model Designation (Example)

RPV06	2-60	V200	- 12	- 30	- 6
(1)	(2)	(3)	(4)	(5)	(6)

(1) Rotary Vacuum Pump Series

(2) Cylinder numbers and layout, motor power output

Code	2-60	3-90	4-200	A-60
Combination	Parallel twin, 60 W motor	Parallel triple, 90 W motor	Parallel quad, 200 W motor	In-line twin, 60 W motor
Final vacuum (50Hz/60Hz) (Pa abs)	≤ 3,500 / ≤ 3,000			≤ 350 / ≤ 300
Final vacuum (50Hz/60Hz) (kPa G)	≤ -97.8 / ≤ -98.3			≤ -100.98 / ≤ -101.03

(3) Motor type (○: Available)

Code	U100	U100SW	U110	V200
Type	Single phase 100 VAC induction motor	Single phase 100 VAC induction motor with a built-in power switch	Single phase 110/115 VAC induction motor	3 phase 200/220/230 VAC induction motor
RPV06A-60	○	○	○	○
RPV062-60	○	○	○	○
RPV063-90	—	—	—	○
RPV064-200	—	—	—	○

*1 For U100SW type, an electrical power cable (2m), a 3-prong to 2-prong electrical adapter, and a tubular fuse (5A) are enclosed.

*2 U100SW type is not CE marked.

(4) Vacuum port

Combination			Tube O.D.		ø10 mm (*)		ø12 mm		ø16 mm		ø3/8 (*)		ø1/2		ø5/8	
Code	Push-in fitting (*)	Straight	10		12		16		13/8		11/2		15/8			
		Elbow	20		22		26		23/8		21/2		25/8			
	Compression fitting	Straight	A0	B0	A2	B2	A6	B6	–	–	–	–	–	–		
		Tube I.D. (mm)	ø6.5	ø7.5	ø8	ø9	ø11	ø13	–	–	–	–	–	–		
No fitting (*)			No code													

*1 ø10 mm or ø3/8" fitting cannot be selectable for RPV064.

*2 The thread sizes of pump's port are different depending on (2) : the cylinder numbers, layout and motor power output. Please refer to Table- 1.

*3 Push-in fittings permit a leakage. Use compression fittings if there is any usability problem.

(5) Exhaust port

Combination			Tube O.D.		ø10 m (*)		ø12 mm		ø16 mm (*)		ø3/8 (*)		ø1/2		ø5/8 (*)	
Code	Push-in fitting	Straight	30		32		36		33/8		31/2		35/8			
		Elbow	40		42		46		43/8		41/2		45/8			
	Compression fitting	Straight	C0	D0	C2	D2	C6	D6	-	-	-	-	-	-		
		Tube I.D. (mm)	ø6.5	ø7.5	ø8	ø9	ø11	ø13	-	-	-	-	-	-		
No fitting(*)			No code													

*1 ø10 mm or ø3/8" fitting cannot be selectable for RPV064.

*2 ø16 mm or ø5/8" fitting cannot be selectable for RPV06A.

*3 The thread sizes of pump's port are different depending on (2) : the cylinder numbers, layout and motor power output. Please refer to Table- 1.

(6) Exhaust cleaner (with fittings)

Combination		Tube O.D.	ø10 mm (*)	ø12 mm	ø16 (*)	ø3/8 (*)	ø1/2	ø5/8 (*)
Code	Exhaust cleaner only	0						
	Exhaust cleaner & straight fitting	5						
	Exhaust cleaner & elbow fitting	6						
	No exhaust cleaner & fittings	No code						

*1 ø10 mm or ø3/8" fitting cannot be selectable for RPV064.

*2 ø16 mm or ø5/8" fitting cannot be selectable for RPV06A.

*3 When selecting code "5" or "6", the tube O.D. of the fitting is same size as the exhaust port (selected in ⑤).

*4 Connection thread size of exhaust cleaner is Rc1/2.

●Table-1. Thread size of vacuum & exhaust port (○: Available)

Thread size	Vacuum port												Exhaust port											
	G3/8						G1/2						G1/4						G3/8					
Tube O.D. (mm/in.)	ø10	ø12	ø16	ø3/8	ø1/2	ø5/8	ø10	ø12	ø16	ø3/8	ø1/2	ø5/8	ø10	ø12	ø16	ø3/8	ø1/2	ø5/8	ø10	ø12	ø16	ø3/8	ø1/2	ø5/8
RPV06A	○	○	○	○	○	○	—	—	—	—	—	—	○	○	—	○	○	—	—	—	—	—	—	—
RPV062	—	—	—	—	—	—	○	○	○	○	○	○	—	—	—	—	—	—	○	○	○	○	○	○
RPV063	—	—	—	—	—	—	○	○	○	○	○	○	—	—	—	—	—	—	○	○	○	○	○	○
RPV064	—	—	—	—	—	—	—	○	○	—	○	○	—	—	—	—	—	—	—	○	○	—	○	○

*1 The pump without a built-in power switch does not come with electrical power cables for motor. Properly connect cables by following the enclosed motor handling instruction manual and detailed safety instructions.

*2 For motor type U 100 (without built-in power switch type), a power supply box with cable, which is designed based on the recommended circuit (See the enclosed motor handling instruction manual.) can be provided. For details, please contact your nearest sales office.

Rotary Vacuum Pump Series

Characteristics

Contribute to energy saving

The top level high efficiency in the industry is realized for the pumping speed per motor power 1(W).
→ 1.0 / 1.2 [pumping speed (ℓ/min) / motor power (W)] (50 / 60 Hz)

Light weight and compact

Space saving is realized by adoption of the special rotor form.

Max weight: about 11.5 kgs. Max. dimension: 125 x 391.6 x 181 mm (width x depth x height) (For 120 L type RPV 064-120 V 200) (Can be installed in narrow space.)

Low heat generation

Low generation of heat is realized by adoption of forced air-cooling system.

No rotating seal structure by magnet coupling minimizes slide section. Thus, there is no heat generation by the seal. The pump can be kept at approx. 20°C lower than equivalent other brand models. (Based on our research.)

Suppressing a rise in room temperature.

Low driving noise and vibration

Low noise operation and low vibration are realized by thorough balancing design for rotary part.

Noise : $\leq 58 / \leq 63$ dB (50/60 Hz) (Same level as air conditioner or quiet car) Vibration is about 1/10 of equivalent other brand models. (Our investigation)

Long life

High durability is realized by adopting of super engineering plastic, which is excellent in self-lubricity and wear resistance, and special surface treatment. With minimum clearance between rotor and cylinder wall, the fundamentally contactless structure and minimization of sliding parts are realized.

Adoption of magnet-coupling, no sliding seal required.

⇒ No maintenance necessary by seal abrasion

⇒ Support to longer operation life of motor by minimizing load to the motor shaft part.

Maintenance free for 3 years. (Based on our operational conditions. Life varies depending on operational conditions, suction air (dust, moisture, etc.) *1 year for RPV06A.

Low generation of dust

Lubrication is unnecessary by adoption of the excellent clean vacuum grease for low dust and low volatile. Low dust generation is realized by minimization of sliding parts.

⇒ Suppress environmental pollution such as abrasion powder created by vane pump.

Suppressing environmental pollution by exhausting cleaner air.

Eco friendly and safe design

RoHS compliance, CE marking corresponding (Single phase 100 VAC type with a built-in power switch does not have CE marking.)

Variety of options.

Not only a pump but also push-in fittings, compression fittings for medium vacuum model, and exhaust cleaners (exhaust mufflers) are prepared as optional.

Single phase 100 VAC (Parallel twin / In-line twin) type with a built-in power switch is available.

It can be used immediately by plugging into an outlet.

Single phase 110 / 115 V type and inch size push-in fitting are selectable.

Applications


Suction Conveyance



Vacuum packing



Defoaming-Deaeration




Vacuum forming



Others

Various vacuum system where scattering of oil or abrasion powder to circumference should be avoided.

Schematic diagram (example) when using for suction conveyance

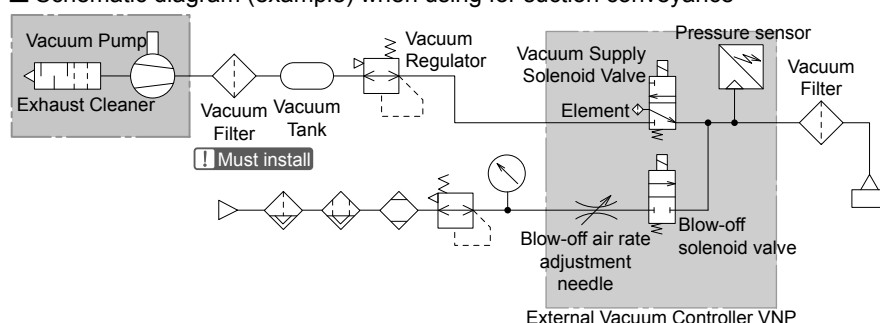

* Compressed air is not necessary for suction conveyance by using the external vacuum controller VNP, which have direct operating valve for vacuum supply and blow-off solenoid valve. (Compressed air is necessary for blow-off.) Therefore, the consumption amount of compressed air can be remarkably reduced.


⚠ Since the rotary vacuum pump is the delicate and precision equipment, make sure to install a vacuum filter, which filtration rate is 5 μm or less, on vacuum port in order to prevent water mist, dust or particles entering the pump. It causes deterioration in a lifetime or damage of the pump when they enter.

Related Products



Rotary Vacuum Pump Series
▶ P.326 to


Operating principle

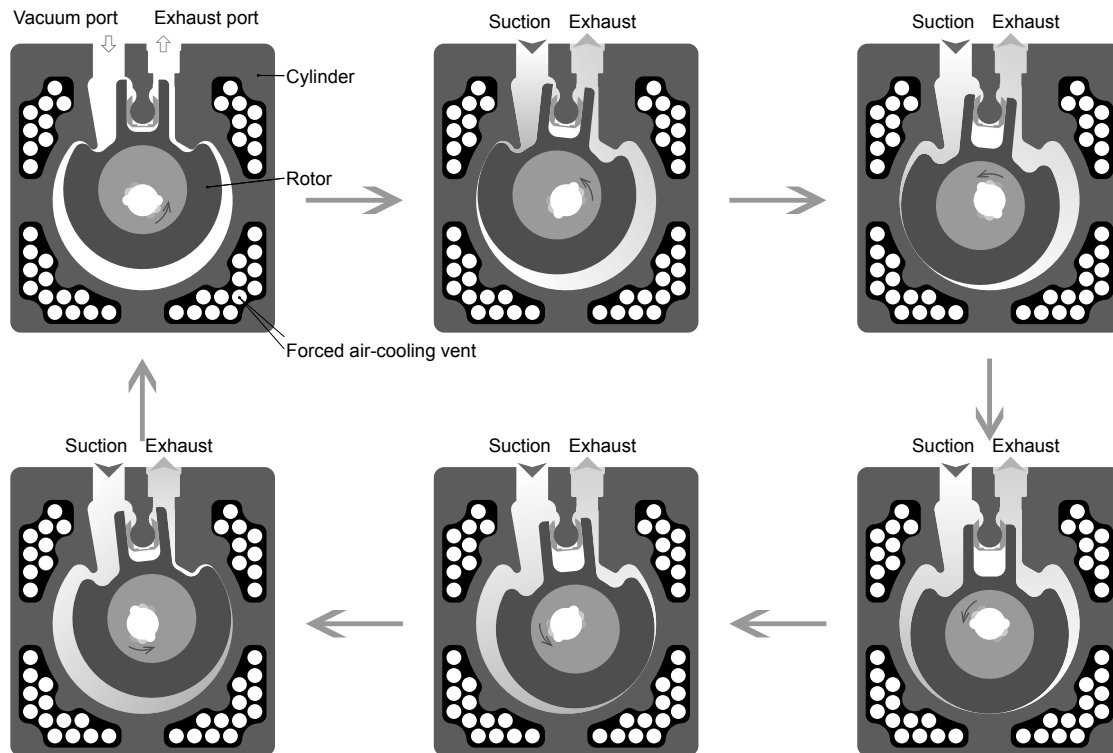

1. The eccentric rotor is placed in the space formed by the cylinder and plates which sandwich the cylinder.
2. When the rotor carries out eccentric rotations, air is inhaled by the pressure difference to atmospheric pressure with increasing capacity of the space formed between the rotor of vacuum port side and cylinder. At the same time, air is discharged with decreasing capacity of the space formed between the rotor of exhaust port side and cylinder.
3. By performing this operation continuously, the air transfer from the vacuum port to the exhaust port is realized.

Sectional drawing

Parallel twin, 60W motor type : RPV062-20

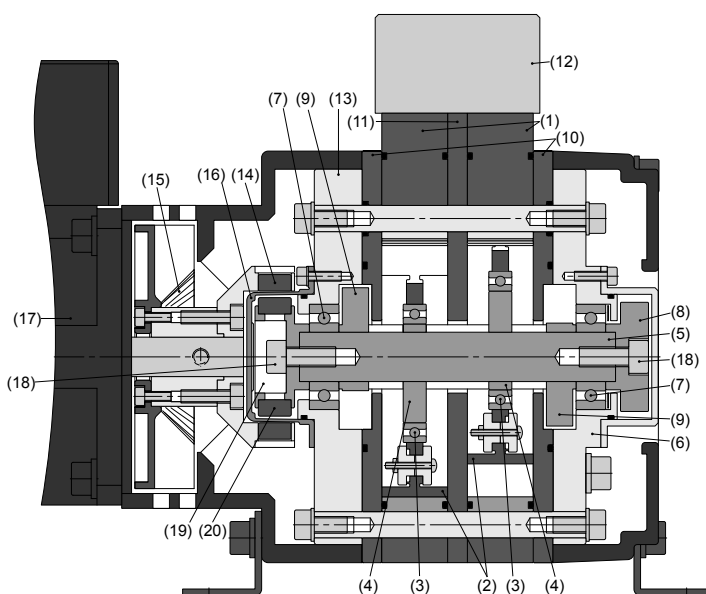



No.	Parts	Material
(1)	Cylinder	aluminum alloy
(2)	Rotor	PPS resin
(3)	Bearing	Stainless steel
(4)	Crank plate	Stainless steel
(5)	Main shaft	Stainless steel
(6)	Side block E	aluminum alloy
(7)	Bearing	Stainless steel
(8)	Balancer E	Stainless steel
(9)	Balancer R	Stainless steel
(10)	Side plate	aluminum alloy
(11)	Center plate	aluminum alloy
(12)	Manifold	aluminum alloy
(13)	Side block M	aluminum alloy
(14)	Magnet	Neodymium magnet
(15)	Cooling fan	PPS resin
(16)	Sealing cup	PPS resin
(17)	Motor	aluminum alloy, etc.
(18)	Cap screw	Stainless steel
(19)	Inner coupling	Stainless steel
(20)	Magnet	Neodymium magnet

* All seal rubber material is FKM.

Rotary Vacuum Pump Series

Specifications

Type		Medium vacuum· 30 ℓ									
Model code		RPV06A-60V200		RPV06A-60U100 (U100SW ^{*2})		RPV06A-60U110					
Numbers of cylinder		Twin (2) 									
Cylinder layout		Parallel layout 									
Pumping speed (ℓ/min)	50 Hz	30									
	60 Hz	36									
Final vacuum (Pa abs)	50 Hz	≤350									
	60 Hz	≤300									
Final vacuum (kPa G)	50 Hz	≤-100.98									
	60 Hz	≤-101.03									
Max. suction pressure		Atmospheric pressure									
Ambient temperature (indoor) (°C)		5 to 40									
Ambient humidity (indoor)		Max. 85%RH (no dew condensation)									
Gas (inhaled gas)		No corrosive or exposable gas									
Vibration of installation site		Max. 4.9 m/s ² (10 to 60 Hz)									
Altitude of installation site		1000 m ASL or less									
Install orientation		Motor axis to be horizontal									
Motor	Output (W)		60								
	Type		3-phase motor, Built-in thermal protector Heat proof class: 130 (B)			Single-phase capacitor type induction motor Built-in thermal protector, Heat proof class: 130 (B)					
	Voltage (V) ^{*3}		200	/	220	/	230	100	110	/	115
	Rated current (A)	50 Hz	0.50	/	—	/	—	1.2	—		
		60 Hz	0.43	/	0.45	/	0.46	1.19	1.09 / 1.1		
	Rated rotation speed (min ⁻¹)	50 Hz	1,300	/	—	/	—	1,200	—		
		60 Hz	1,550	/	1,600	/	1,600	1,450	1,450 / 1,450		
	Striking current (A)	50 Hz	1.51	/	—	/	—	2.66	—		
60 Hz		1.37	/	1.51	/	1.52	2.55	2.74 / 2.79			
Operation noise (dB (A)) ^{*1}	50 Hz	≤58						—			
	60 Hz	≤63									
Vacuum port size		G 3/8									
Exhaust port size		G 1/4									
Dimensions (width x depth x height) (mm)		125 × 299.6 × 166.5 (U 100 SW ^{*2} : 125 × 299.6 × 180.8)									
Weight (kg)		7.0			7.2 (U100SW ^{*2} : 7.5 (including accessories))						
Cooling system		Forced air cooling									

*1. Operating noise is an actually measured value excluding suction and exhaust noises, and is not a guaranteed value. Operating noise varies depending on operating condition.

*2. Power switch built-in type. Not CE marking product

*3. Temporary fluctuation range of voltage is within ±10% of rated voltage. In case of continuous fluctuation, ±3% of rated voltage is allowable.


*4. The final vacuum and the pumping speed described in the specification are confirmed at the time of delivery inspection according to our standard. The performance after normal operation for a certain running period of time will be the following table possibly.

Type	Operation period	Final vacuum		Pumping speed
RPV06A	1 year	50 Hz	1.2 kPa abs -100.1 Kpa G	-20% compared with spec. value
		60 Hz	1.0 kPa abs -100.3 Kpa G	

*The values are based on our operating conditions. The product life varies depending on the operation conditions and the inhaled gas (moisture or dust), etc.

About vacuum pressure indication

■ Absolute pressure (kPa abs or Pa abs) and gauge pressure (kPa G) are used in Pisco's vacuum pump catalogue. Please be careful not to make a mistake in a unit when selecting a pump. For other Vacuum equipment in this catalog, Gauge pressure (-kPa) is used.

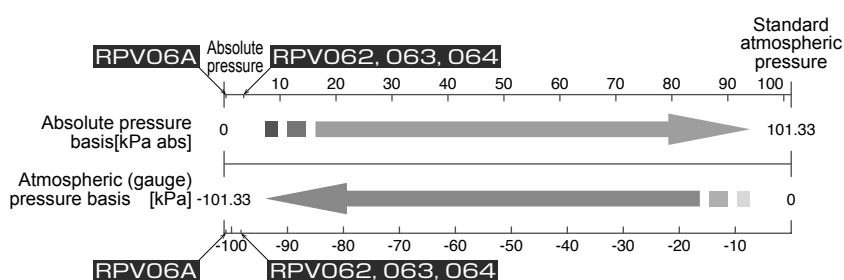

Type		Low vacuum· 60 ℓ									
Model code		RPV062-60V200		RPV062-60U100 (U100SW ^{*2})		RPV062-60U110					
Numbers of cylinder		Twin (2)									
Cylinder layout		Parallel layout									
Pumping speed (ℓ/min)		50 Hz	60								
		60 Hz	72								
Final vacuum (Pa abs)		50 Hz	≤ 3,500								
		60 Hz	≤ 3,000								
Final vacuum (kPa G)		50 Hz	≤ -97.8								
		60 Hz	≤ -98.3								
Max. suction pressure		Atmospheric pressure									
Ambient temperature (indoor) (°C)		5 to 40									
Ambient humidity (indoor)		Max. 85%RH (no dew condensation)									
Gas (inhaled gas)		No corrosive or exposable gas									
Vibration of installation site		Max. 4.9 m/s ² (10 to 60 Hz)									
Altitude of installation site		1000 m ASL or less									
Install orientation		Motor axis to be horizontal									
Motor	Output (W)		60								
	Type		3-phase motor, Built-in thermal protector Heat proof class: 130 (B)			Single-phase capacitor type induction motor Built-in thermal protector, Heat proof class: 130 (B)					
	Voltage (V) ^{*3}		200	/	220	/	230	100	110	/	115
	Rated current (A)	50 Hz	0.50	/	—	/	—	1.2	—		
		60 Hz	0.43	/	0.45	/	0.46	1.19	1.09	/	1.1
	Rated rotation speed (min ⁻¹)	50 Hz	1,300	/	—	/	—	1,200	—		
		60 Hz	1,550	/	1,600	/	1,600	1,450	1,450	/	1,450
	Striking current (A)	50 Hz	1.51	/	—	/	—	2.66	—		
		60 Hz	1.37	/	1.51	/	1.52	2.55	2.74	/	2.79
Operation noise (dB (A)) ^{*1}		50 Hz	≤ 58					—			
		60 Hz	≤ 63								
Vacuum port size		G1/2									
Exhaust port size		G3/8									
Dimensions (width × depth × height) (mm)		125 × 299.6 × 176 (U100SW ^{*2} : 125 × 299.6 × 180.8)									
Weight (kg)		7.2 (U100SW ^{*2} : 7.6 (including accessories))									
Cooling system		Forced air cooling									

*1. Operating noise is an actually measured value excluding suction and exhaust noises, and is not a guaranteed value. Operating noise varies depending on operating condition.

*2. Power switch built-in type. Not CE marking product

*3. Temporary fluctuation range of voltage is within ±10% of rated voltage. In case of continuous fluctuation, ±3% of rated voltage is allowable.



*4. The final vacuum and the pumping speed described in the specification are confirmed at the time of delivery inspection according to our standard. The performance after normal operation for a certain running period of time will be the following table possibly.

■ Table. Final vacuum and pumping speed based on the running period

Type	Operation period	Final vacuum		Pumping speed
RPV062	3 years	50 Hz	12 kPa abs	-20% compared withspec. value
			-89.3 Kpa G	
		60 Hz	10 kPa abs	
			-91.3 Kpa G	

*The values are based on our operating conditions. The product life varies depending on the operation conditions and the inhaled gas (moisture or dust), etc.

Rotary Vacuum Pump Series

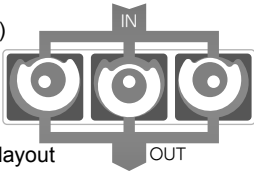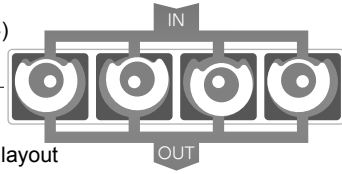Type		Low vacuum· 90 ℓ					Low vacuum· 120 ℓ					
Model code		RPV063-90V200					RPV064-200V200					
Numbers of cylinder		Triple (3) 					Quad (4) 					
Cylinder layout		Parallel layout					Parallel layout					
Pumping speed (ℓ/min)	50 Hz	90					120					
	60 Hz	108					144					
Final vacuum (Pa abs)	50 Hz	≤ 3,500										
	60 Hz	≤ 3,000										
Final vacuum (kPa G)	50 Hz	≤ -97.8										
	60 Hz	≤ -98.3										
Max. suction pressure		Atmospheric pressure										
Ambient temperature (indoor) (°C)		5 to 40										
Ambient humidity (indoor)		Max. 85%RH (no dew condensation)										
Gas (inhaled gas)		No corrosive or exposable gas										
Vibration of installation site		Max. 4.9 m/s ² (10 to 60 Hz)										
Altitude of installation site		1000 m ASL or less										
Install orientation		Motor axis to be horizontal										
Motor	Output (W)	90					200					
	Type	3-phase motor, Built-in thermal protector Heat proof class: 130 (B)										
	Voltage (V) * ³	200	/	220	/	230	200	/	220	/	230	
	Rated current (A)	50 Hz	0.64	/	—	/	—	1.1	/	—	/	—
		60 Hz	0.59	/	0.6	/	0.61	1.1	/	0.95	/	0.95
	Rated rotation speed (min ⁻¹)	50 Hz	1,300	/	—	/	—	1,250	/	—	/	—
		60 Hz	1,550	/	1,600	/	1,600	1,500	/	1,550	/	1,600
	Striking current (A)	50 Hz	2.01	/	—	/	—	3.60	/	—	/	—
		60 Hz	1.86	/	2.00	/	2.05	3.27	/	3.54	/	3.63
Operation noise (dB (A)) * ¹	50 Hz	≤ 58										
	60 Hz	≤ 63										
Vacuum port size							G1/2					
Exhaust port size							G3/8					
Dimensions (width × depth × height) (mm)		125 × 340.6 × 181					125 × 391.6 × 181					
Weight (kg)		8.8 * ²					11.5 * ²					
Cooling system		Forced air cooling										

*1. Operating noise is an actually measured value excluding suction and exhaust noises, and is not a guaranteed value. Operating noise varies depending on operating condition.

*2. Weight includes attached 2 plugs.

*3. Temporary fluctuation range of voltage is within ±10% of rated voltage. In case of continuous fluctuation, ±3% of rated voltage is allowable.

*4. The final vacuum and the pumping speed described in the specification are confirmed at the time of delivery inspection according to our standard. The performance after normal operation for a certain running period of time will be the following table possibly.







■ Table. Final vacuum and pumping speed based on the running period

Type	Operation period	Final vacuum		Pumping speed
RPV063 RPV064	3 years	50 Hz	12 kPa abs	-20% compared withspec. value
			-89.3 Kpa G	
		60 Hz	10 kPa abs	
			-91.3 Kpa G	

*The values are based on our operating conditions. The product life varies depending on the operation conditions and the inhaled gas (moisture or dust), etc.

RoHS2 (2011/65/EU+EU2015/863) compliant

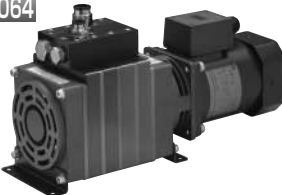

In-line/Twin		Parallel/Twin	
Type	Model code	Type	Model code
Medium vacuum, 30 ℓ RPV06A 	RPV06A-60V200-[4]-[5]-[6] RPV06A-60U100-[4]-[5]-[6] RPV06A-60U110-[4]-[5]-[6]	Low vacuum·60 ℓ RPV062 	RPV062-60V200-[4]-[5]-[6] RPV062-60U100-[4]-[5]-[6] RPV062-60U110-[4]-[5]-[6]
Type	Model code	Type	Model code
Medium vacuum, 30 ℓ (Single-phase motor & Built-in power switch type) RPV06A 	RPV06A-60U100SW-[4]-[5]-[6]	Low vacuum, 60 ℓ (Built-in power switch type) RPV062 	RPV062-60U100SW-[4]-[5]-[6]
Parallel/Triple		Parallel/Quad	
Type	Model code	Type	Model code
Low vacuum·90 ℓ RPV063 	RPV063-90V200-[4]-[5]-[6]	Low vacuum·120 ℓ RPV064 	RPV064-200V200-[4]-[5]-[6]



Notes

- *1. For [4] in model code, please select a vacuum port size. For [5], select an exhaust port size and for [6], select a code for exhaust cleaner (and fitting).
- *2. U100SW type is not CE marked.












CAD data is available
at PISCO website.




Packaging specifications
1 pc. /box


Rotary Vacuum Pump Series


RoHS2 (2011/65/EU+EU2015/863) compliant

Optional parts					
For vacuum port					
Type	Model code PCøD-G	Type	Model code PLøD-G	Type	Model code NBCøD-G
Push-in fitting Straight PC	PC10-G3 PC10-G4 PC12-G3 PC12-G4 PC16-G3 PC16-G4 PC ³ / ₈ -G3 PC ³ / ₈ -G4 PC ¹ / ₂ -G3 PC ¹ / ₂ -G4 PC ⁵ / ₈ -G3 PC ⁵ / ₈ -G4	Push-in fitting Elbow PL	PL10-G3 PL10-G4 PL12-G3 PL12-G4 PL16-G3 PL16-G4 PL ³ / ₈ -G3 PL ³ / ₈ -G4 PL ¹ / ₂ -G3 PL ¹ / ₂ -G4 PL ⁵ / ₈ -G3 PL ⁵ / ₈ -G4	Compression fitting Straight NBC	NBC1065-G3 NBC1065-G4 NBC1075-G3 NBC1075-G4 NBC1280-G3 NBC1280-G4 NBC1290-G3 NBC1290-G4 NBC1611-G3 NBC1611-G4 NBC1613-G3 NBC1613-G4
					
For exhaust port					
Type	Model code PCøD-G	Type	Model code PLøD-G	Type	Model code NBCøD-G
Push-in fitting Straight PC	PC10-G2 PC10-G3 PC12-G2 PC12-G3 PC16-G3 PC ³ / ₈ -G2 PC ³ / ₈ -G3 PC ¹ / ₂ -G2 PC ¹ / ₂ -G3 PC ⁵ / ₈ -G3	Push-in fitting Elbow PL	PL10-G2 PL10-G3 PL12-G2 PL12-G3 PL16-G3 PL ³ / ₈ -G2 PL ³ / ₈ -G3 PL ¹ / ₂ -G2 PL ¹ / ₂ -G3 PL ⁵ / ₈ -G3	Compression fitting Straight NBC	NBC1065-G2 NBC1065-G3 NBC1075-G2 NBC1075-G3 NBC1280-G2 NBC1280-G3 NBC1290-G2 NBC1290-G3 NBC1611-G3 NBC1613-G3
					
Exhaust air cleaner					
Type	Model code				
Exhaust air cleaner RPVF-04	RPVF-04				
					
Type	Model code PCøD-R				
Push-in fitting Straight for Exhaust air cleaner PC	PC10-04 PC12-04 PC16-04 PC ³ / ₈ -04 PC ¹ / ₂ -04 PC ⁵ / ₈ -04				
					
Type	Model code PLøD-R				
Push-in fitting Elbow for Exhaust air cleaner PL	PL10-04 PL12-04 PL16-04 PL ³ / ₈ -04 PL ¹ / ₂ -04 PL ⁵ / ₈ -04				
					

Replacement element

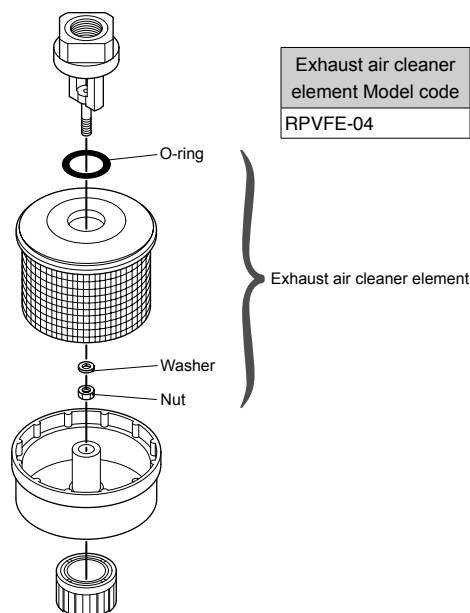

 CAD data is available
at PISCO website.

 Packaging specifications
1 pc. /box: Exhaust air cleaner, Exhaust air cleaner element
10 pcs. /bag: Straight/Elbow fitting for vacuum/exhaust port or for exhaust air cleaner